


SV HF

Bulkhead fitting, French series

Properties

| | |
|---------------------------|--|
| Connection 1 + 2 | metric cylindrical outer thread |
| Sealing form 1 + 2 | 24° inner cone |
| Design | Bulkhead fitting |
| Construction type | French series |
| Construction | straight |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Steel |
| Surface | electro galvanised |

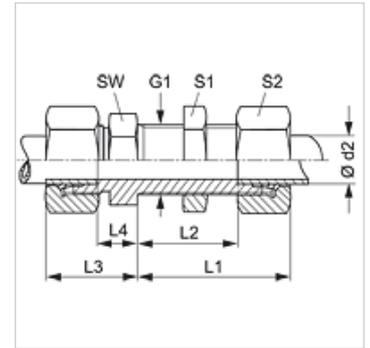

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Operating pressure | Ø d2 (mm) | G1 | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | AF (mm) | S1 | S2 |
|----------------|--------------------|--------------|------------|------------|------------|------------|------------|------------|----|----|
| SV NW 10 HF | PN 400 | 13,25 | M 20 x 1.5 | 47,5 | 25 | 32,5 | 10 | 27 | 27 | 27 |
| SV NW 13 HF | PN 250 | 16,75 | M 24 x 1.5 | 49,5 | 26 | 34,5 | 11 | 30 | 30 | 30 |
| SV NW 16 HF | PN 250 | 21,25 | M 30 x 1.5 | 52,0 | 28 | 37,0 | 13 | 36 | 36 | 36 |
| SV NW 20 HF | PN 160 | 26,75 | M 36 x 1.5 | 54,0 | 29 | 40,0 | 15 | 42 | 42 | 42 |
| SV NW 25 HF | PN 160 | 33,50 | M 45 x 1.5 | 58,0 | 33 | 44,0 | 19 | 55 | 55 | 55 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter