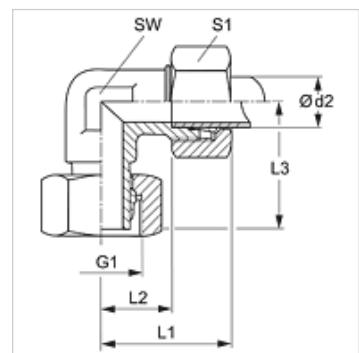


Properties

Connection 1	metric nut thread
Sealing form 1	24° outer cone
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction fitting
Construction type	French series
Construction	Angle 90°
Scope of supply	Socket with union nut and cutting ring
Material	Steel
Surface	electro galvanised

**Note**

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Operating pressure	Ø d2 (mm)	G1	L1 (mm)	L2 (mm)	L3 (mm)	AF (mm)	S1
VEW NW 10 HF	PN 300	13,25	M 20 x 1.5	25	16	30,5	19	27
VEW NW 13 HF	PN 300	16,75	M 24 x 1.5	27	18	32,5	24	30
VEW NW 16 HF	PN 200	21,25	M 30 x 1.5	32	23	36,5	30	36
VEW NW 20 HF	PN 200	26,75	M 36 x 1.5	36	27	41,0	36	46
VEW NW 25 HF	PN 160	33,50	M 45 x 1.5	44	35	47,5	46	55

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter