


# W HF

Fitting, angle 90°, French series

**HANSA FLEX**

## Properties

<b>Connection 1 + 2</b>	metric cylindrical outer thread
<b>Sealing form 1 + 2</b>	24° inner cone
<b>Design</b>	Fitting
<b>Construction type</b>	French series
<b>Construction</b>	Angle 90°
<b>Scope of supply</b>	Socket with union nut and cutting ring
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

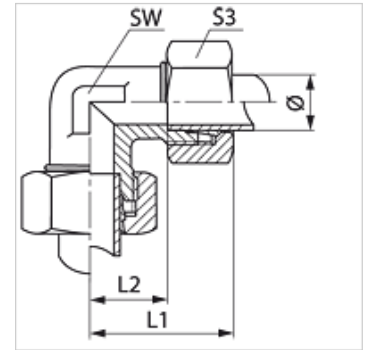

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Operating pressure	External pipe Ø (mm)	L1 (mm)	L2 (mm)	AF (mm)	S3
W NW 10 HF	PN 400	13,25	38,5	16	19	27
W NW 13 HF	PN 250	16,75	41,5	18	24	30
W NW 16 HF	PN 250	21,25	47,0	23	30	36
W NW 20 HF	PN 250	26,75	52,0	27	36	46
W NW 25 HF	PN 160	33,50	60,0	35	46	55

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter