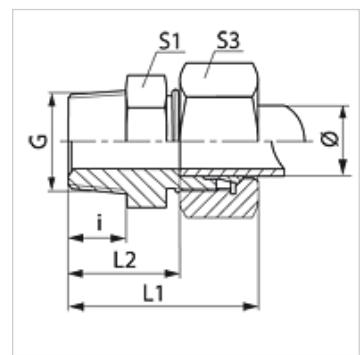


**Properties**

Connection 1	BSPT conical external threads
Sealing form 1	thread seal
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Screw-in fitting
Construction	straight
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket with union nut and cutting ring
Material	Brass

**Note**

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

**Item**

Identification	Series	Operating pressure PN	External pipe Ø (mm)	G	i (mm)	L1 (mm)	L2 (mm)	S1	S3
<b>VR 04 LL MG</b>	LL	PN 63	4	R 1/8" K	8	26	16,0	11	10
<b>VR 06 LL MG</b>	LL	PN 63	6	R 1/8" K	8	26	14,5	11	12
<b>VR 08 LL 1/4 MG</b>	LL	PN 63	8	R 1/4" K	13	33	21,5	17	14
<b>VR 08 LL MG</b>	LL	PN 63	8	R 1/8" K	8	28	16,5	12	14
<b>VR 10 LL MG</b>	LL	PN 63	10	R 1/4" K	12	32	20,5	14	17
<b>VR 12 LL MG</b>	LL	PN 63	12	R 1/4" K	12	32	20,0	17	19

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter

**Product versions**

<b>VRK</b>	Screw-in fitting, Steel
<b>VRK VA</b>	Screw in fitting, Stainless steel