


XGAM VA

Screw-on fitting

HANSA FLEX

Properties

Connection 1	metric cylindrical inner thread
Sealing form 1	Shape A
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Screw-on fitting
Construction	straight
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Stainless steel

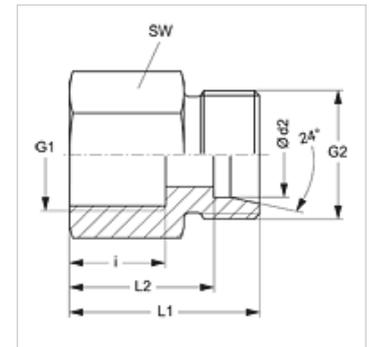

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2	i (mm)	L1 (mm)	L2 (mm)	AF (mm)
XGAM NW 04 HL VA	L	PN 315	6	M 10 x 1	M 12 x 1.5	12,5	26,5	19,5	14
XGAM NW 06 HL VA	L	PN 315	8	M 12 x 1.5	M 14 x 1.5	17,0	31,0	24,0	17
XGAM NW 08 HL VA	L	PN 315	10	M 14 x 1.5	M 16 x 1.5	17,0	32,0	25,0	19
XGAM NW 10 HL VA	L	PN 315	12	M 16 x 1.5	M 18 x 1.5	17,0	33,0	26,0	22
XGAM NW 10 HL 18 VA	L	PN 315	12	M 18 x 1.5	M 18 x 1.5	17,0	33,0	26,0	22
XGAM NW 13 HL VA	L	PN 315	15	M 18 x 1.5	M 22 x 1.5	17,0	34,0	27,0	24
XGAM NW 16 HL VA	L	PN 315	18	M 22 x 1.5	M 26 x 1.5	19,0	36,0	28,5	27
XGAM NW 20 HL VA	L	PN 160	22	M 26 x 1.5	M 30 x 2	21,0	41,0	33,5	32
XGAM NW 25 HL VA	L	PN 160	28	M 33 x 2	M 36 x 2	24,0	44,0	36,5	41
XGAM NW 32 HL VA	L	PN 160	35	M 42 x 2	M 45 x 2	26,0	49,0	38,5	50
XGAM NW 40 HL VA	L	PN 160	42	M 48 x 2	M 52 x 2	28,0	51,0	40,0	55
XGAM NW 03 HS VA	S	PN 630	6	M 12 x 1.5	M 14 x 1.5	17,0	33,0	26,0	17
XGAM NW 04 HS VA	S	PN 630	8	M 14 x 1.5	M 16 x 1.5	17,0	33,0	26,0	19
XGAM NW 06 HS VA	S	PN 630	10	M 16 x 1.5	M 18 x 1.5	17,0	34,0	26,5	22
XGAM NW 08 HS VA	S	PN 630	12	M 18 x 1.5	M 20 x 1.5	17,0	34,0	26,5	24
XGAM NW 08 HS 20 VA	S	PN 400	12	M 20 x 1.5	M 20 x 1.5	17,0	38,5	31,0	27
XGAM NW 10 HS VA	S	PN 630	14	M 20 x 1.5	M 22 x 1.5	19,0	38,5	31,0	27
XGAM NW 13 HS VA	S	PN 400	16	M 22 x 1.5	M 24 x 1.5	19,0	39,0	30,5	30
XGAM NW 16 HS VA	S	PN 400	20	M 27 x 2	M 30 x 2	22,0	45,0	34,5	36
XGAM NW 20 HS VA	S	PN 400	25	M 33 x 2	M 36 x 2	24,0	49,0	37,0	41
XGAM NW 25 HS VA	S	PN 400	30	M 42 x 2	M 42 x 2	26,0	55,0	41,5	55
XGAM NW 32 HS VA	S	PN 315	38	M 48 x 2	M 52 x 2	28,0	59,0	43,0	60

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

XGAM	Screw-on fitting, Steel
GAM VA	Screw-on fitting, Stainless steel