


### Properties

<b>Design</b>	Flare connection with 2 O-rings
<b>Standard</b>	DIN 3949
<b>Scope of supply</b>	1x union nut, 1x pressure ring, 1x spacer ring
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

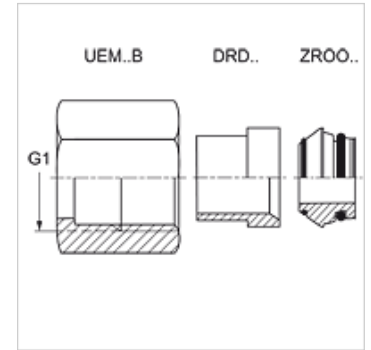

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Item

Identification	Series	Operating pressure	for external pipe Ø (mm)	G1
BOOK NW 04 L	L	PN 400	6	M 12 x 1.5
BOOK NW 06 L	L	PN 400	8	M 14 x 1.5
BOOK NW 08 L	L	PN 400	10	M 16 x 1.5
BOOK NW 10 L	L	PN 400	12	M 18 x 1.5
BOOK NW 13 L	L	PN 400	15	M 22 x 1.5
BOOK NW 16 L	L	PN 400	18	M 26 x 1.5
BOOK NW 20 L	L	PN 250	22	M 30 x 2
BOOK NW 25 L	L	PN 250	28	M 36 x 2
BOOK NW 32 L	L	PN 250	35	M 45 x 2
BOOK NW 40 L	L	PN 250	42	M 52 x 2
BOOK NW 03 S	S	PN 630	6	M 14 x 1.5
BOOK NW 04 S	S	PN 630	8	M 16 x 1.5
BOOK NW 06 S	S	PN 630	10	M 18 x 1.5
BOOK NW 08 S	S	PN 630	12	M 20 x 1.5
BOOK NW 10 S	S	PN 630	14	M 22 x 1.5
BOOK NW 13 S	S	PN 400	16	M 24 x 1.5
BOOK NW 16 S	S	PN 400	20	M 30 x 2
BOOK NW 20 S	S	PN 400	25	M 36 x 2
BOOK NW 25 S	S	PN 400	30	M 42 x 2
BOOK NW 32 S	S	PN 315	38	M 52 x 2

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure

### Product versions

**BOOK VA** Flare connection with 2 O-rings, 1x union nut, 1x pressure ring, 1x spacer ring