


BOOK VA

Flare connection with 2 O-rings

HANSA FLEX

Properties

Design	Flare connection with 2 O-rings
Standard	DIN 3949
Scope of supply	1x union nut, 1x pressure ring, 1x spacer ring
Material	Stainless steel

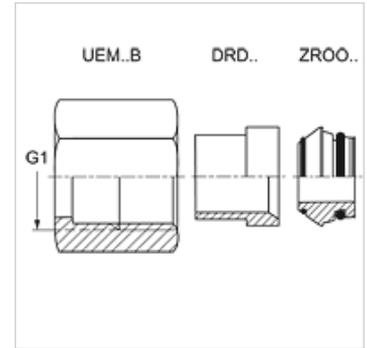

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

Identification	Series	Operating pressure	for external pipe Ø (mm)	G1
BOOK NW 04 L VA	L	PN 400	6	M 12 x 1.5
BOOK NW 06 L VA	L	PN 400	8	M 14 x 1.5
BOOK NW 08 L VA	L	PN 400	10	M 16 x 1.5
BOOK NW 10 L VA	L	PN 400	12	M 18 x 1.5
BOOK NW 13 L VA	L	PN 400	15	M 22 x 1.5
BOOK NW 16 L VA	L	PN 400	18	M 26 x 1.5
BOOK NW 20 L VA	L	PN 250	22	M 30 x 2
BOOK NW 25 L VA	L	PN 250	28	M 36 x 2
BOOK NW 32 L VA	L	PN 250	35	M 45 x 2
BOOK NW 40 L VA	L	PN 250	42	M 52 x 2
BOOK NW 03 S VA	S	PN 630	6	M 14 x 1.5
BOOK NW 04 S VA	S	PN 630	8	M 16 x 1.5
BOOK NW 06 S VA	S	PN 630	10	M 18 x 1.5
BOOK NW 08 S VA	S	PN 630	12	M 20 x 1.5
BOOK NW 10 S VA	S	PN 630	14	M 22 x 1.5
BOOK NW 13 S VA	S	PN 400	16	M 24 x 1.5
BOOK NW 16 S VA	S	PN 400	20	M 30 x 2
BOOK NW 20 S VA	S	PN 400	25	M 36 x 2
BOOK NW 25 S VA	S	PN 400	30	M 42 x 2
BOOK NW 32 S VA	S	PN 315	38	M 52 x 2

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure

Product versions

BOOK Flare connection with 2 O-rings, 1x union nut, 1x pressure ring, 1x spacer ring