


BOOK VA

Flare connection with 2 O-rings

HANSA FLEX

Properties

| | |
|------------------------|--|
| Design | Flare connection with 2 O-rings |
| Standard | DIN 3949 |
| Scope of supply | 1x union nut, 1x pressure ring, 1x spacer ring |
| Material | Stainless steel |

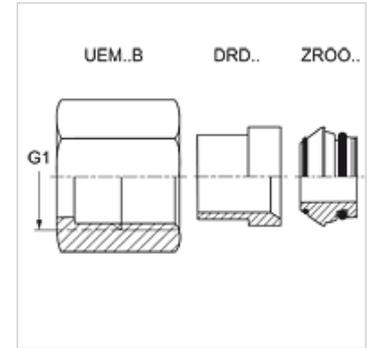

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

| Identification | Series | Operating pressure | for external pipe Ø (mm) | G1 |
|-----------------|--------|--------------------|-----------------------------|------------|
| BOOK NW 04 L VA | L | PN 400 | 6 | M 12 x 1.5 |
| BOOK NW 06 L VA | L | PN 400 | 8 | M 14 x 1.5 |
| BOOK NW 08 L VA | L | PN 400 | 10 | M 16 x 1.5 |
| BOOK NW 10 L VA | L | PN 400 | 12 | M 18 x 1.5 |
| BOOK NW 13 L VA | L | PN 400 | 15 | M 22 x 1.5 |
| BOOK NW 16 L VA | L | PN 400 | 18 | M 26 x 1.5 |
| BOOK NW 20 L VA | L | PN 250 | 22 | M 30 x 2 |
| BOOK NW 25 L VA | L | PN 250 | 28 | M 36 x 2 |
| BOOK NW 32 L VA | L | PN 250 | 35 | M 45 x 2 |
| BOOK NW 40 L VA | L | PN 250 | 42 | M 52 x 2 |
| BOOK NW 03 S VA | S | PN 630 | 6 | M 14 x 1.5 |
| BOOK NW 04 S VA | S | PN 630 | 8 | M 16 x 1.5 |
| BOOK NW 06 S VA | S | PN 630 | 10 | M 18 x 1.5 |
| BOOK NW 08 S VA | S | PN 630 | 12 | M 20 x 1.5 |
| BOOK NW 10 S VA | S | PN 630 | 14 | M 22 x 1.5 |
| BOOK NW 13 S VA | S | PN 400 | 16 | M 24 x 1.5 |
| BOOK NW 16 S VA | S | PN 400 | 20 | M 30 x 2 |
| BOOK NW 20 S VA | S | PN 400 | 25 | M 36 x 2 |
| BOOK NW 25 S VA | S | PN 400 | 30 | M 42 x 2 |
| BOOK NW 32 S VA | S | PN 315 | 38 | M 52 x 2 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure

Product versions

BOOK Flare connection with 2 O-rings, 1x union nut, 1x pressure ring, 1x spacer ring