


XSVM

Bulkhead screw-in fitting

Properties

| | |
|------------------------|---|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | Shape A |
| Connection 2 | metric cylindrical outer thread |
| Sealing form 2 | 24° inner cone |
| Design | Bulkhead screw-in fitting |
| Construction | straight |
| Standard | DIN 2353 ISO 8434-1 |
| Scope of supply | Socket (without union nut and cutting ring) |
| Material | Steel |
| Surface | electro galvanised |

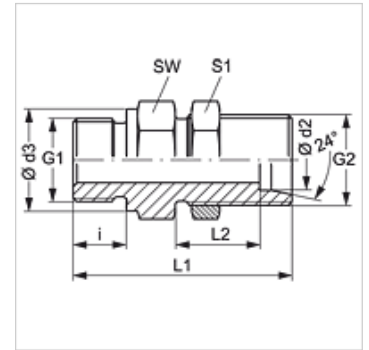

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | G2 | Ø d3 (mm) | i (mm) | L1 (mm) | AF (mm) | S1 |
|-----------------------------|--------|--------------------|-----------|------------|------------|-----------|--------|---------|---------|----|
| XSVM NW 13 HS | S | PN 400 | 16 | M 22 x 1.5 | M 24 x 1.5 | 27 | 14 | 68,0 | 32 | 32 |
| XSVM NW 16 HS 22 | S | PN 400 | 20 | M 22 x 1.5 | M 30 x 2 | 27 | 14 | 70,0 | 41 | 41 |
| XSVM NW 16 HS 26 | S | PN 400 | 20 | M 26 x 1.5 | M 30 x 2 | 31 | 16 | 72,0 | 41 | 41 |
| XSVM NW 20 HS 26 | S | PN 400 | 25 | M 26 x 1.5 | M 36 x 2 | 31 | 16 | 75,0 | 41 | 46 |
| XSVM NW 20 HS 30-1.5 | S | PN 400 | 25 | M 30 x 1.5 | M 36 x 2 | 36 | 16 | 75,0 | 41 | 46 |
| XSVM NW 25 HS 30-1.5 | S | PN 400 | 30 | M 30 x 1.5 | M 42 x 2 | 36 | 16 | 79,0 | 50 | 50 |
| XSVM NW 25 HS 38-1.5 | S | PN 400 | 30 | M 38 x 1.5 | M 42 x 2 | 44 | 16 | 79,0 | 50 | 50 |
| XSVM NW 25 HS 45-1.5 | S | PN 400 | 30 | M 45 x 1.5 | M 42 x 2 | 52 | 16 | 79,0 | 55 | 50 |
| XSVM NW 32 HS 38-1.5 | S | PN 315 | 38 | M 38 x 1.5 | M 52 x 2 | 44 | 16 | 81,5 | 60 | 65 |
| XSVM NW 32 HS 45-1.5 | S | PN 315 | 38 | M 45 x 1.5 | M 52 x 2 | 52 | 16 | 81,5 | 60 | 65 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter