


VERSCHLUSS HJ

Blanking socket

HANSA FLEX

Properties

| | |
|----------------|-------------------------|
| Connection 1 | UN/UNF external threads |
| Sealing form 1 | 74° outer cone |
| Design | Blanking socket |
| Material | Steel |
| Surface | electro galvanised |

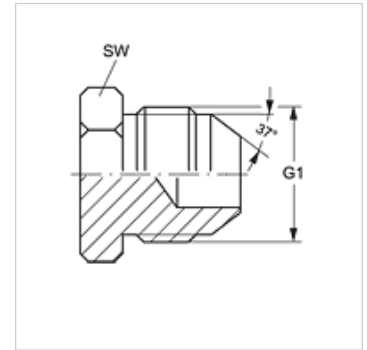

Item

| Identification | G1 | AF (mm) |
|------------------|----------------|------------|
| VERSCHLUSS HJ 04 | 7/16"-20 UNF | 12 |
| VERSCHLUSS HJ 05 | 1/2"-20 UNF | 14 |
| VERSCHLUSS HJ 06 | 9/16"-18 UNF | 19 |
| VERSCHLUSS HJ 08 | 3/4"-16 UNF | 19 |
| VERSCHLUSS HJ 10 | 7/8" -14 UNF | 24 |
| VERSCHLUSS HJ 12 | 1.1/16" -12 UN | 27 |
| VERSCHLUSS HJ 14 | 1.3/16" -12 UN | 32 |
| VERSCHLUSS HJ 16 | 1.5/16" -12 UN | 36 |
| VERSCHLUSS HJ 20 | 1.5/8" -12 UN | 46 |
| VERSCHLUSS HJ 24 | 1.7/8" -12 UN | 50 |
| VERSCHLUSS HJ 32 | 2.1/2" -12 UN | 65 |

SW, S1, S2 = With across flats

Product versions

| | |
|------------------|----------------------------------|
| VERSCHLUSS HJ VA | Blanking socket, Stainless steel |
|------------------|----------------------------------|