


# W45 HMO HJOF

Screw-in socket, angle 45°

## Properties

|                       |                                      |
|-----------------------|--------------------------------------|
| <b>Connection 1</b>   | metric cylindrical outer thread      |
| <b>Sealing form 1</b> | O-ring seal on screw-in socket       |
| <b>Connection 2</b>   | ORFS external threads                |
| <b>Sealing form 2</b> | flat seal with O-ring                |
| <b>Design</b>         | Adjustable direction screw-in socket |
| <b>Construction</b>   | Angle 45°                            |
| <b>Material</b>       | Steel                                |
| <b>Surface</b>        | electro galvanised                   |

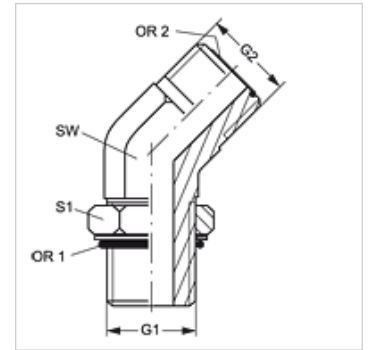

## Item

| Identification            | G1         | G2              | AF<br>(mm) | S1 | OR1          | OR2          |
|---------------------------|------------|-----------------|------------|----|--------------|--------------|
| <b>W45 HMO 12 HJOF 04</b> | M 12 x 1.5 | 9/16"-18 UNF    | 14         | 17 | 9.30 x 2.30  | 7.65 x 1.78  |
| <b>W45 HMO 16 HJOF 06</b> | M 16 x 1.5 | 11/16" -16 UN   | 19         | 22 | 13.30 x 2.30 | 9.25 x 1.78  |
| <b>W45 HMO 18 HJOF 08</b> | M 18 x 1.5 | 13/16" -16 UN   | 19         | 24 | 15.30 x 2.30 | 12.42 x 1.78 |
| <b>W45 HMO 22 HJOF 10</b> | M 22 x 1.5 | 1" -14 UNS      | 27         | 27 | 19.30 x 2.30 | 15.60 x 1.78 |
| <b>W45 HMO 27 HJOF 12</b> | M 27 x 2   | 1.3/16" -12 UN  | 30         | 32 | 23.47 x 2.95 | 18.77 x 1.78 |
| <b>W45 HMO 33 HJOF 16</b> | M 33 x 2   | 1.7/16" -12 UN  | 36         | 41 | 29.74 x 2.95 | 23.52 x 1.78 |
| <b>W45 HMO 42 HJOF 20</b> | M 42 x 2   | 1.11/16" -12 UN | 41         | 50 | 38.00 x 3.00 | 29.87 x 1.78 |
| <b>W45 HMO 48 HJOF 24</b> | M 48 x 2   | 2" -12 UN       | 50         | 55 | 44.04 x 3.53 | 37.82 x 1.78 |

SW, S1, S2 = With across flats