


W45 HRK HJR

Screw-in socket, angle 45°

Properties

| | |
|------------------------------|----------------------------------|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 | BSP cylindrical external threads |
| Sealing form 2 | 60° outer cone |
| Design | Screw-in sockets |
| Construction | Angle 45° |
| Standard connection 2 | JIS B 8363 |
| Material | Steel |
| Surface | electro galvanised |

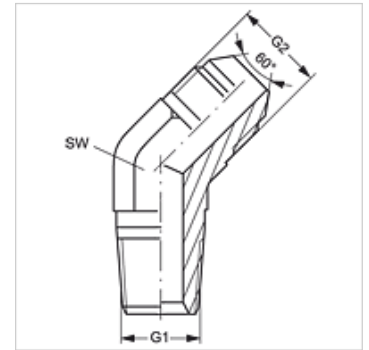

Item

| Identification | G1 | G2 | AF (mm) |
|----------------|----------|------------|------------|
| W45 HRK 04 HJR | R 1/4" K | G 1/4" -19 | 14 |
| W45 HRK 06 HJR | R 3/8" K | G 3/8" -19 | 19 |
| W45 HRK 08 HJR | R 1/2" K | G 1/2" -14 | 22 |
| W45 HRK 12 HJR | R 3/4" K | G 3/4" -14 | 27 |
| W45 HRK 16 HJR | R 1" K | G 1" -11 | 33 |

AF = Width across flats