# W90 AOB HB


Connector, angle 90°

HANSA-FLEX

## Properties

| | |
|---|---|
| **Connection 1** | BSP nut thread |
| **Sealing form 1** | 60° outer cone with O-ring |
| **Connection 2** | BSP cylindrical external threads |
| **Sealing form 2** | 60° inner cone |
| **Design** | Connectors |
| **Construction** | straight |
| **Material** | Steel |
| **Surface** | electro galvanised |



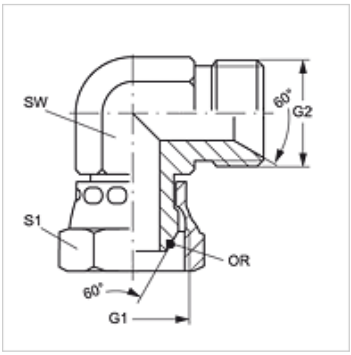


## Item

| Identification | G1 + G2 | AF (mm) | S1 | OR |
|---|---|---|---|---|
| **W90 AOB 02 HB** | G 1/8" -28 | 11 | 14 | 4.5 x 1.5 |
| **W90 AOB 04 HB** | G 1/4" -19 | 14 | 17 | 6.5 x 1.0 |
| **W90 AOB 06 HB** | G 3/8" -19 | 19 | 22 | 8.1 x 1.6 |
| **W90 AOB 08 HB** | G 1/2" -14 | 22 | 27 | 12.1 x 1.6 |
| **W90 AOB 10 HB** | G 5/8" -14 | 25 | 27 | 13.1 x 1.6 |
| **W90 AOB 12 HB** | G 3/4" -14 | 27 | 32 | 17.1 x 1.6 |
| **W90 AOB 16 HB** | G 1" -11 | 33 | 41 | 22.1 x 1.6 |
| **W90 AOB 20 HB** | G 1.1/4" -11 | 41 | 50 | 29.1 x 1.6 |
| **W90 AOB 24 HB** | G 1.1/2" -11 | 50 | 60 | 35.1 x 1.6 |

SW, S1, S2 = With across flats

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*