


### Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	60° inner cone
Connection 2	NPT external threads
Sealing form 2	thread seal
Design	Screw-in sockets
Construction	Angle 90°
Material	Steel
Surface	electro galvanised

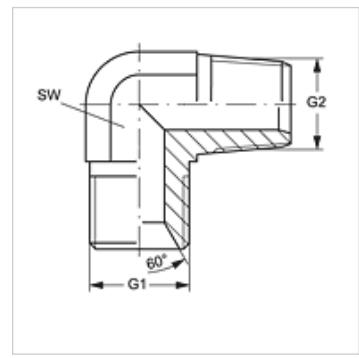

### Item

Identification	G1	G2	AF (mm)
<b>W90 HB 02 HN</b>	G 1/8" -28	1/8" -27 NPT	11
<b>W90 HB 04 HN 02</b>	G 1/4" -19	1/8" -27 NPT	14
<b>W90 HB 04 HN</b>	G 1/4" -19	1/4" -18 NPT	14
<b>W90 HB 06 HN 04</b>	G 3/8" -19	1/4" -18 NPT	19
<b>W90 HB 06 HN</b>	G 3/8" -19	3/8" -18 NPT	19
<b>W90 HB 06 HN 08</b>	G 3/8" -19	1/2" -14 NPT	22
<b>W90 HB 08 HN 06</b>	G 1/2" -14	3/8" -18 NPT	22
<b>W90 HB 08 HN</b>	G 1/2" -14	1/2" -14 NPT	22
<b>W90 HB 12 HN 08</b>	G 3/4" -14	1/2" -14 NPT	27
<b>W90 HB 12 HN</b>	G 3/4" -14	3/4" -14 NPT	27
<b>W90 HB 16 HN</b>	G 1" -11	1" -11.5 NPT	33
<b>W90 HB 20 HN</b>	G 1.1/4" -11	1.1/4" -11.5 NPT	41
<b>W90 HB 24 HN</b>	G 1.1/2" -11	1.1/2" -11.5 NPT	50
<b>W90 HB 32 HN</b>	G 2" -11	2" -11.5 NPT	55

AF = Width across flats