


W90 HMOK HB

Screw-in socket, angle 90°

Properties

| | |
|-----------------------|---------------------------------------------------|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 | BSP cylindrical external threads |
| Sealing form 2 | 60° inner cone |
| Design | Adjustable direction screw-in socket |
| Construction | Angle 90° |
| Material | Steel |
| Surface | electro galvanised |

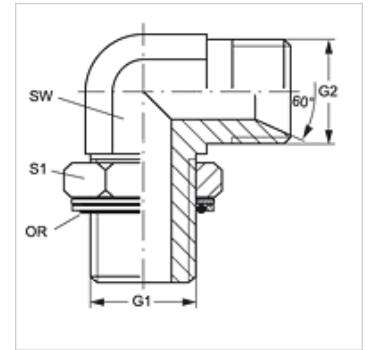

Item

| Identification | G1 | G2 | AF (mm) | S1 | OR |
|-------------------|------------|--------------|------------|----|--------------|
| W90 HMOK 10 HB 02 | M 10 x 1 | G 1/8" -28 | 11 | 15 | 8.00 x 1.50 |
| W90 HMOK 12 HB 02 | M 12 x 1.5 | G 1/8" -28 | 14 | 18 | 9.30 x 2.40 |
| W90 HMOK 12 HB 04 | M 12 x 1.5 | G 1/4" -19 | 14 | 18 | 9.30 x 2.40 |
| W90 HMOK 14 HB 04 | M 14 x 1.5 | G 1/4" -19 | 14 | 20 | 11.30 x 2.40 |
| W90 HMOK 14 HB 06 | M 14 x 1.5 | G 3/8" -19 | 14 | 20 | 11.30 x 2.40 |
| W90 HMOK 16 HB 04 | M 16 x 1.5 | G 1/4" -19 | 19 | 20 | 13.30 x 2.40 |
| W90 HMOK 16 HB 06 | M 16 x 1.5 | G 3/8" -19 | 19 | 20 | 13.30 x 2.40 |
| W90 HMOK 18 HB 06 | M 18 x 1.5 | G 3/8" -19 | 19 | 25 | 15.30 x 2.40 |
| W90 HMOK 18 HB 08 | M 18 x 1.5 | G 1/2" -14 | 19 | 25 | 15.30 x 2.40 |
| W90 HMOK 20 HB 08 | M 20 x 1.5 | G 1/2" -14 | 27 | 28 | 17.30 x 2.40 |
| W90 HMOK 22 HB 08 | M 22 x 1.5 | G 1/2" -14 | 27 | 28 | 19.30 x 2.40 |
| W90 HMOK 22 HB 10 | M 22 x 1.5 | G 5/8" -14 | 27 | 28 | 19.30 x 2.40 |
| W90 HMOK 22 HB 12 | M 22 x 1.5 | G 3/4" -14 | 27 | 28 | 19.30 x 2.40 |
| W90 HMOK 26 HB 12 | M 26 x 1.5 | G 3/4" -14 | 30 | 33 | 23.50 x 2.60 |
| W90 HMOK 27 HB 12 | M 27 x 2 | G 3/4" -14 | 30 | 33 | 23.47 x 2.95 |
| W90 HMOK 33 HB 16 | M 33 x 2 | G 1" -11 | 36 | 42 | 29.74 x 2.95 |
| W90 HMOK 42 HB 20 | M 42 x 2 | G 1.1/4" -11 | 41 | 50 | 38.00 x 3.00 |
| W90 HMOK 48 HB 24 | M 48 x 2 | G 1.1/2" -11 | 50 | 56 | 44.00 x 3.00 |

SW, S1, S2 = With across flats

Spare parts

KAMMRING M Diaphragm ring, metric