


W90 HRK HJ

Screw-in socket, angle 90°

Properties

| | |
|-----------------------|-------------------------------|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 | UN/UNF external threads |
| Sealing form 2 | 74° outer cone |
| Design | Screw-in sockets |
| Construction | Angle 90° |
| Material | Steel |
| Surface | electro galvanised |

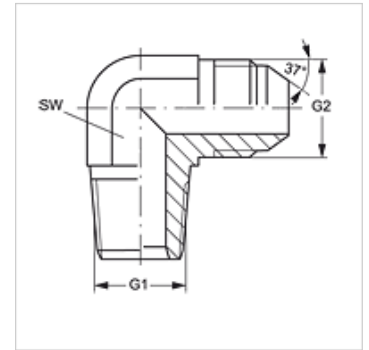

Item

| Identification | G1 | G2 | AF (mm) |
|------------------|------------|----------------|------------|
| W90 HRK 02 HJ 04 | R 1/8" K | 7/16"-20 UNF | 11 |
| W90 HRK 02 HJ 05 | R 1/8" K | 1/2"-20 UNF | 13 |
| W90 HRK 02 HJ 06 | R 1/8" K | 9/16"-18 UNF | 14 |
| W90 HRK 04 HJ | R 1/4" K | 7/16"-20 UNF | 14 |
| W90 HRK 04 HJ 05 | R 1/4" K | 1/2"-20 UNF | 14 |
| W90 HRK 04 HJ 06 | R 1/4" K | 9/16"-18 UNF | 14 |
| W90 HRK 04 HJ 08 | R 1/4" K | 3/4"-16 UNF | 19 |
| W90 HRK 06 HJ 04 | R 3/8" K | 7/16"-20 UNF | 19 |
| W90 HRK 06 HJ 05 | R 3/8" K | 1/2"-20 UNF | 19 |
| W90 HRK 06 HJ | R 3/8" K | 9/16"-18 UNF | 19 |
| W90 HRK 06 HJ 08 | R 3/8" K | 3/4"-16 UNF | 19 |
| W90 HRK 06 HJ 10 | R 3/8" K | 7/8"-14 UNF | 22 |
| W90 HRK 08 HJ 04 | R 1/2" K | 7/16"-20 UNF | 22 |
| W90 HRK 08 HJ 06 | R 1/2" K | 9/16"-18 UNF | 22 |
| W90 HRK 08 HJ | R 1/2" K | 3/4"-16 UNF | 22 |
| W90 HRK 08 HJ 10 | R 1/2" K | 7/8"-14 UNF | 22 |
| W90 HRK 08 HJ 12 | R 1/2" K | 1.1/16" -12 UN | 27 |
| W90 HRK 12 HJ 08 | R 3/4" K | 3/4"-16 UNF | 27 |
| W90 HRK 12 HJ 10 | R 3/4" K | 7/8"-14 UNF | 27 |
| W90 HRK 12 HJ | R 3/4" K | 1.1/16" -12 UN | 27 |
| W90 HRK 12 HJ 16 | R 3/4" K | 1.5/16" -12 UN | 33 |
| W90 HRK 16 HJ 10 | R 1" K | 7/8"-14 UNF | 33 |
| W90 HRK 16 HJ 12 | R 1" K | 1.1/16" -12 UN | 33 |
| W90 HRK 16 HJ | R 1" K | 1.5/16" -12 UN | 33 |
| W90 HRK 16 HJ 20 | R 1" K | 1.5/8" -12 UN | 41 |
| W90 HRK 20 HJ 16 | R 1.1/4" K | 1.5/16" -12 UN | 41 |
| W90 HRK 20 HJ | R 1.1/4" K | 1.5/8" -12 UN | 41 |
| W90 HRK 24 HJ | R 1.1/2" K | 1.7/8" -12 UN | 48 |
| W90 HRK 32 HJ | R 2" K | 2.1/2" -12 UN | 66 |

AF = Width across flats