


# W90 HRK HJR

Screw-in socket, angle 90°

## Properties

|                              |                                  |
|------------------------------|----------------------------------|
| <b>Connection 1</b>          | BSPT conical external threads    |
| <b>Sealing form 1</b>        | thread seal                      |
| <b>Connection 2</b>          | BSP cylindrical external threads |
| <b>Sealing form 2</b>        | 60° outer cone                   |
| <b>Design</b>                | Screw-in sockets                 |
| <b>Construction</b>          | Angle 90°                        |
| <b>Standard connection 2</b> | JIS B 8363                       |
| <b>Material</b>              | Steel                            |
| <b>Surface</b>               | electro galvanised               |

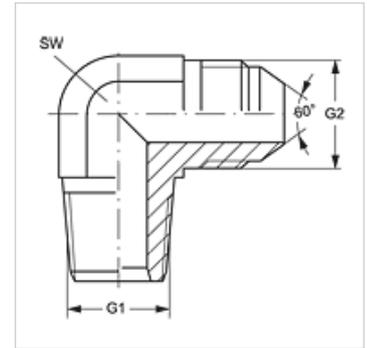

## Item

| Identification | G1       | G2         | AF<br>(mm) |
|----------------|----------|------------|------------|
| W90 HRK 04 HJR | R 1/4" K | G 1/4" -19 | 14         |
| W90 HRK 06 HJR | R 3/8" K | G 3/8" -19 | 19         |
| W90 HRK 08 HJR | R 1/2" K | G 1/2" -14 | 22         |
| W90 HRK 12 HJR | R 3/4" K | G 3/4" -14 | 27         |
| W90 HRK 16 HJR | R 1" K   | G 1" -11   | 33         |

AF = Width across flats