


W90 HRO HJ

Screw-in socket, angle 90°

Properties

| | |
|-----------------------|--------------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | form G |
| Connection 2 | UN/UNF external threads |
| Sealing form 2 | 74° outer cone |
| Design | Adjustable direction screw-in socket |
| Construction | Angle 90° |
| Material | Steel |
| Surface | electro galvanised |

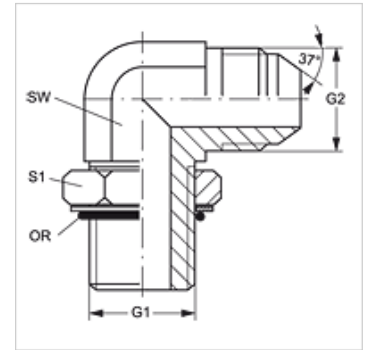

Item

| Identification | G1 | G2 | AF (mm) | S1 | OR |
|------------------|--------------|----------------|------------|----|--------------|
| W90 HRO 02 HJ 05 | G 1/8" -28 | 1/2"-20 UNF | 13 | 14 | 8.00 x 2.00 |
| W90 HRO 06 HJ 04 | G 3/8" -19 | 7/16" -20 UN | 19 | 22 | 13.94 x 2.62 |
| W90 HRO 06 HJ 05 | G 3/8" -19 | 1/2"-20 UNF | 19 | 22 | 13.94 x 2.62 |
| W90 HRO 06 HJ 08 | G 3/8" -19 | 3/4"-16 UNF | 19 | 22 | 13.94 x 2.62 |
| W90 HRO 06 HJ 10 | G 3/8" -19 | 7/8"-14 UNF | 22 | 22 | 13.94 x 2.62 |
| W90 HRO 08 HJ 04 | G 1/2" -14 | 7/16"-20 UNF | 22 | 22 | 17.86 x 2.62 |
| W90 HRO 08 HJ 06 | G 1/2" -14 | 9/16"-18 UNF | 22 | 27 | 17.86 x 2.62 |
| W90 HRO 12 HJ | G 3/4" -14 | 1.1/16" -12 UN | 27 | 36 | 23.47 x 2.62 |
| W90 HRO 12 HJ 14 | G 3/4" -14 | 1.3/16" -12 UN | 33 | 36 | 23.47 x 2.62 |
| W90 HRO 12 HJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 33 | 36 | 23.47 x 2.62 |
| W90 HRO 16 HJ 12 | G 1" -11 | 1.1/16" -12 UN | 33 | 41 | 29.74 x 3.53 |
| W90 HRO 20 HJ 16 | G 1.1/4" -11 | 1.5/16" -12 UN | 33 | 36 | 37.69 x 3.53 |
| W90 HRO 20 HJ 24 | G 1.1/4" -11 | 1.7/8" -12 UN | 48 | 50 | 37.69 x 3.53 |
| W90 HRO 24 HJ | G 1.1/2" -11 | 1.7/8" -12 UN | 48 | 55 | 44.04 x 3.53 |

SW, S1, S2 = With across flats