


# W90 HROK HJL

Screw-in socket, angle 90°

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	O-ring and spacer diaphragm ring
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	60° outer cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	Angle 90°
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

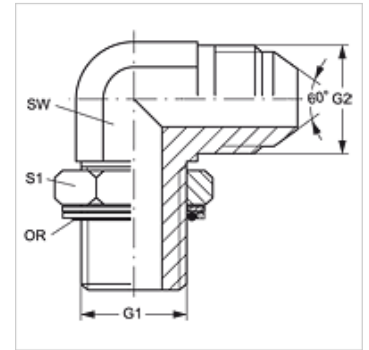

## Item

Identification	G1	G2	AF (mm)	S1	OR
<b>W90 HROK 04 NW 06 HJL</b>	G 1/4" -19	M 14 x 1.5	14	17	10.78 x 2.62
<b>W90 HROK 06 NW 08 HJL</b>	G 3/8" -19	M 16 x 1.5	19	19	13.94 x 2.62
<b>W90 HROK 06 NW 10 HJL</b>	G 3/8" -19	M 18 x 1.5	19	22	13.94 x 2.62
<b>W90 HROK 08 NW 13 HJL</b>	G 1/2" -14	M 22 x 1.5	22	27	17.86 x 2.62
<b>W90 HROK 12 NW 20 HJL</b>	G 3/4" -14	M 30 x 1.5	27	32	23.47 x 2.62
<b>W90 HROK 16 NW 25 HJL</b>	G 1" -11	M 33 x 1.5	33	38	29.74 x 3.53

SW, S1, S2 = With across flats

## Spare parts

<b>KAMMRING G</b>	Spacer diaphragm ring, imperial
-------------------	---------------------------------