
# W90 HROK AOB

Screw-in socket, angle 90°

## Properties

| | |
|---|---|
| **Connection 1** | BSP external thread, cylindrical |
| **Sealing form 1** | O-ring and spacer diaphragm ring |
| **Connection 2** | BSP nut thread |
| **Sealing form 2** | 60° outer cone with O-ring |
| **Design** | Screw-in sockets |
| **Construction** | straight |
| **Material** | Steel |
| **Surface** | electro galvanised |



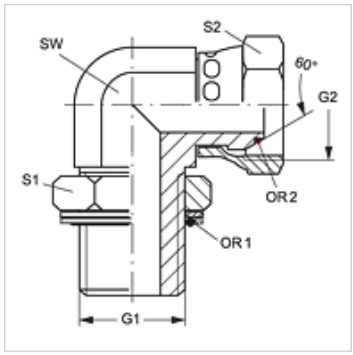


## Item

| Identification | G1 | G2 | AF (mm) | S1 | S2 | OR1 | OR2 |
|---|---|---|---|---|---|---|---|
| **W90 HROK 04 AOB 02** | G 1/4" -19 | G 1/8" -28 | 14 | 20 | 14 | 10.77 x 2.62 | 4.5 x 1.5 |
| **W90 HROK 04 AOB** | G 1/4" -19 | G 1/4" -19 | 14 | 20 | 17 | 10.77 x 2.62 | 6.5 x 1.0 |
| **W90 HROK 06 AOB 04** | G 3/8" -19 | G 1/4" -19 | 19 | 24 | 17 | 13.94 x 2.62 | 6.5 x 1.0 |
| **W90 HROK 06 AOB** | G 3/8" -19 | G 3/8" -19 | 19 | 24 | 22 | 13.94 x 2.62 | 8.1 x 1.6 |
| **W90 HROK 08 AOB 06** | G 1/2" -14 | G 3/8" -19 | 22 | 28 | 27 | 17.86 x 2.62 | 8.1 x 1.6 |
| **W90 HROK 08 AOB** | G 1/2" -14 | G 1/2" -14 | 22 | 28 | 27 | 17.86 x 2.62 | 12.1 x 1.6 |
| **W90 HROK 08 AOB 12** | G 1/2" -14 | G 3/4" -14 | 27 | 28 | 32 | 17.86 x 2.62 | 17.1 x 1.6 |
| **W90 HROK 12 AOB 08** | G 3/4" -14 | G 1/2" -14 | 30 | 35 | 27 | 23.47 x 2.62 | 12.1 x 1.6 |
| **W90 HROK 12 AOB** | G 3/4" -14 | G 3/4" -14 | 30 | 35 | 32 | 23.47 x 2.62 | 17.1 x 1.6 |
| **W90 HROK 16 AOB** | G 1" -11 | G 1" -11 | 36 | 43 | 32 | 29.75 x 3.53 | 22.1 x 1.6 |
| **W90 HROK 20 AOB** | G 1.1/4" -11 | G 1.1/4" -11 | 50 | 52 | 50 | 37.69 x 3.53 | 29.1 x 1.6 |
| **W90 HROK 24 AOB** | G 1.1/2" -11 | G 1.1/2" -11 | 50 | 58 | 60 | 44.04 x 3.53 | 35.1 x 1.6 |

SW, S1, S2 = With across flats

## Spare parts

| | |
|---|---|
| **KAMMRING G** | Spacer diaphragm ring, imperial |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*