


# W90 HROK AOB

Screw-in socket, angle 90°

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	O-ring and spacer diaphragm ring
<b>Connection 2</b>	BSP nut thread
<b>Sealing form 2</b>	60° outer cone with O-ring
<b>Design</b>	Screw-in sockets
<b>Construction</b>	straight
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

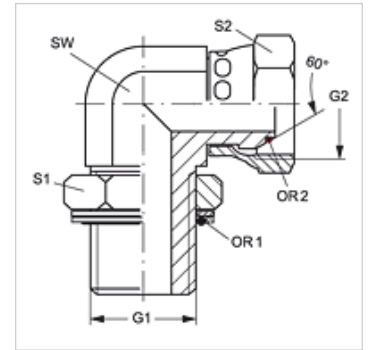

## Item

Identification	G1	G2	AF (mm)	S1	S2	OR1	OR2
<b>W90 HROK 04 AOB 02</b>	G 1/4" -19	G 1/8" -28	14	20	14	10.77 x 2.62	4.5 x 1.5
<b>W90 HROK 04 AOB</b>	G 1/4" -19	G 1/4" -19	14	20	17	10.77 x 2.62	6.5 x 1.0
<b>W90 HROK 06 AOB 04</b>	G 3/8" -19	G 1/4" -19	19	24	17	13.94 x 2.62	6.5 x 1.0
<b>W90 HROK 06 AOB</b>	G 3/8" -19	G 3/8" -19	19	24	22	13.94 x 2.62	8.1 x 1.6
<b>W90 HROK 08 AOB 06</b>	G 1/2" -14	G 3/8" -19	22	28	27	17.86 x 2.62	8.1 x 1.6
<b>W90 HROK 08 AOB</b>	G 1/2" -14	G 1/2" -14	22	28	27	17.86 x 2.62	12.1 x 1.6
<b>W90 HROK 08 AOB 12</b>	G 1/2" -14	G 3/4" -14	27	28	32	17.86 x 2.62	17.1 x 1.6
<b>W90 HROK 12 AOB 08</b>	G 3/4" -14	G 1/2" -14	30	35	27	23.47 x 2.62	12.1 x 1.6
<b>W90 HROK 12 AOB</b>	G 3/4" -14	G 3/4" -14	30	35	32	23.47 x 2.62	17.1 x 1.6
<b>W90 HROK 16 AOB</b>	G 1" -11	G 1" -11	36	43	32	29.75 x 3.53	22.1 x 1.6
<b>W90 HROK 20 AOB</b>	G 1.1/4" -11	G 1.1/4" -11	50	52	50	37.69 x 3.53	29.1 x 1.6
<b>W90 HROK 24 AOB</b>	G 1.1/2" -11	G 1.1/2" -11	50	58	60	44.04 x 3.53	35.1 x 1.6

SW, S1, S2 = With across flats

## Spare parts

<b>KAMMRING G</b>	Spacer diaphragm ring, imperial
-------------------	---------------------------------