


# W90 HROK HB

Screw-in socket, angle 90°

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	Thread socket with O-ring + spacer diaphragm ring
<b>Connection 2</b>	BSP cylindrical external threads
<b>Sealing form 2</b>	60° inner cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	Angle 90°
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

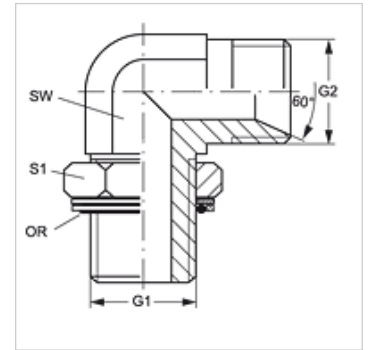

## Item

Identification	G1	G2	AF (mm)	S1	OR
W90 HROK 02 HB	G 1/8" -28	G 1/8" -28	11	14	7.97 x 1.88
W90 HROK 04 HB 02	G 1/4" -19	G 1/8" -28	14	19	10.77 x 2.62
W90 HROK 04 HB	G 1/4" -19	G 1/4" -19	14	19	10.77 x 2.62
W90 HROK 04 HB 06	G 1/4" -19	G 3/8" -19	14	19	10.77 x 2.62
W90 HROK 06 HB 04	G 3/8" -19	G 1/4" -19	19	22	13.94 x 2.62
W90 HROK 06 HB	G 3/8" -19	G 3/8" -19	19	22	13.94 x 2.62
W90 HROK 06 HB 08	G 3/8" -19	G 1/2" -14	19	22	13.94 x 2.62
W90 HROK 08 HB 06	G 1/2" -14	G 3/8" -19	22	27	17.86 x 2.62
W90 HROK 08 HB	G 1/2" -14	G 1/2" -14	22	27	17.86 x 2.62
W90 HROK 08 HB 10	G 1/2" -14	G 5/8" -14	22	27	17.86 x 2.62
W90 HROK 08 HB 12	G 1/2" -14	G 3/4" -14	27	27	17.86 x 2.62
W90 HROK 12 HB 08	G 3/4" -14	G 1/2" -14	27	35	23.47 x 2.62
W90 HROK 12 HB	G 3/4" -14	G 3/4" -14	27	36	23.47 x 2.62
W90 HROK 12 HB 16	G 3/4" -14	G 1" -11	33	36	23.47 x 2.62
W90 HROK 16 HB 12	G 1" -11	G 3/4" -14	33	41	29.74 x 3.53
W90 HROK 16 HB	G 1" -11	G 1" -11	33	41	29.74 x 3.53
W90 HROK 20 HB 16	G 1.1/4" -11	G 1" -11	41	50	37.69 x 3.53
W90 HROK 20 HB	G 1.1/4" -11	G 1.1/4" -11	41	50	37.69 x 3.53
W90 HROK 24 HB	G 1.1/2" -11	G 1.1/2" -11	48	55	44.04 x 3.53

SW, S1, S2 = With across flats

## Spare parts

**KAMMRING G** Spacer diaphragm ring, imperial