


W90 HROK HJOF

Screw-in socket, angle 90°

HANSA FLEX

Properties

| | |
|-----------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 | ORFS external threads |
| Sealing form 2 | flat seal with O-ring |
| Design | Adjustable direction screw-in socket |
| Construction | Angle 90° |
| Material | Steel |
| Surface | electro galvanised |

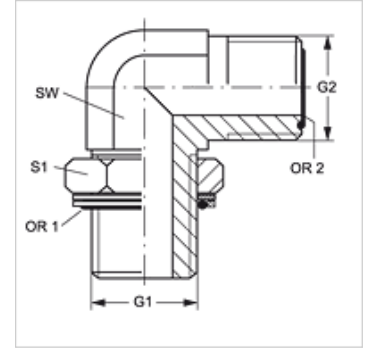

Item

| Identification | G1 | G2 | AF (mm) | S1 | OR1 | OR2 |
|---------------------|--------------|-----------------|------------|----|--------------|--------------|
| W90 HROK 02 HJOF 04 | G 1/8" -28 | 9/16"-18 UNF | 14 | 14 | 8.00 x 2.00 | 7.65 x 1.78 |
| W90 HROK 04 HJOF | G 1/4" -19 | 9/16"-18 UNF | 19 | 19 | 10.77 x 2.62 | 7.65 x 1.78 |
| W90 HROK 04 HJOF 06 | G 1/4" -19 | 11/16" -16 UN | 19 | 19 | 10.77 x 2.62 | 9.25 x 1.78 |
| W90 HROK 04 HJOF 08 | G 1/4" -19 | 13/16" -16 UN | 19 | 19 | 10.77 x 2.62 | 12.42 x 1.78 |
| W90 HROK 06 HJOF 04 | G 3/8" -19 | 9/16"-18 UNF | 19 | 22 | 13.94 x 2.62 | 7.65 x 1.78 |
| W90 HROK 06 HJOF | G 3/8" -19 | 11/16" -16 UN | 19 | 22 | 13.94 x 2.62 | 9.25 x 1.78 |
| W90 HROK 06 HJOF 08 | G 3/8" -19 | 13/16" -16 UN | 19 | 22 | 13.94 x 2.62 | 12.42 x 1.78 |
| W90 HROK 06 HJOF 10 | G 3/8" -19 | 1" -14 UNS | 27 | 22 | 13.94 x 2.62 | 15.60 x 1.78 |
| W90 HROK 08 HJOF 06 | G 1/2" -14 | 11/16" -16 UN | 27 | 27 | 17.86 x 2.62 | 9.25 x 1.78 |
| W90 HROK 08 HJOF | G 1/2" -14 | 13/16" -16 UN | 27 | 27 | 17.86 x 2.62 | 12.42 x 1.78 |
| W90 HROK 08 HJOF 10 | G 1/2" -14 | 1" -14 UNS | 27 | 27 | 17.86 x 2.62 | 15.60 x 1.78 |
| W90 HROK 08 HJOF 12 | G 1/2" -14 | 1.3/16" -12 UN | 30 | 27 | 17.86 x 2.62 | 18.77 x 1.78 |
| W90 HROK 12 HJOF 08 | G 3/4" -14 | 13/16" -16 UN | 30 | 36 | 23.47 x 2.62 | 12.42 x 1.78 |
| W90 HROK 12 HJOF 10 | G 3/4" -14 | 1" -14 UNS | 30 | 36 | 23.47 x 2.62 | 15.60 x 1.78 |
| W90 HROK 12 HJOF | G 3/4" -14 | 1.3/16" -12 UN | 30 | 36 | 23.47 x 2.62 | 18.77 x 1.78 |
| W90 HROK 12 HJOF 16 | G 3/4" -14 | 1.7/16" -12 UN | 36 | 36 | 23.47 x 2.62 | 23.52 x 1.78 |
| W90 HROK 16 HJOF 10 | G 1" -11 | 1" -14 UNS | 36 | 41 | 29.75 x 3.53 | 15.60 x 1.78 |
| W90 HROK 16 HJOF 12 | G 1" -11 | 1.3/16" -12 UN | 36 | 41 | 29.75 x 3.53 | 18.77 x 1.78 |
| W90 HROK 16 HJOF | G 1" -11 | 1.7/16" -12 UN | 36 | 41 | 29.75 x 3.53 | 23.52 x 1.78 |
| W90 HROK 16 HJOF 20 | G 1" -11 | 1.11/16" -12 UN | 41 | 41 | 29.75 x 3.53 | 29.87 x 1.78 |
| W90 HROK 20 HJOF 16 | G 1.1/4" -11 | 1.7/16" -12 UN | 41 | 50 | 37.69 x 3.53 | 23.52 x 1.78 |
| W90 HROK 20 HJOF | G 1.1/4" -11 | 1.11/16" -12 UN | 41 | 50 | 37.69 x 3.53 | 29.87 x 1.78 |
| W90 HROK 24 HJOF 20 | G 1.1/2" -11 | 1.11/16" -12 UN | 50 | 55 | 44.04 x 3.53 | 29.87 x 1.78 |
| W90 HROK 24 HJOF | G 1.1/2" -11 | 2" -12 UN | 50 | 55 | 44.04 x 3.53 | 37.82 x 1.78 |

SW, S1, S2 = With across flats

Product versions

W90 HROK HJOF VA Screw-in socket, angle 90°, Stainless steel

Spare parts

KAMRING G Spacer diaphragm ring, imperial