


# W90 HROK HJOF VA

Screw-in socket, angle 90°

**HANSA FLEX**

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	Thread socket with O-ring + spacer diaphragm ring
<b>Connection 2</b>	ORFS external threads
<b>Sealing form 2</b>	flat seal with O-ring
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	Angle 90°
<b>Material</b>	Stainless steel

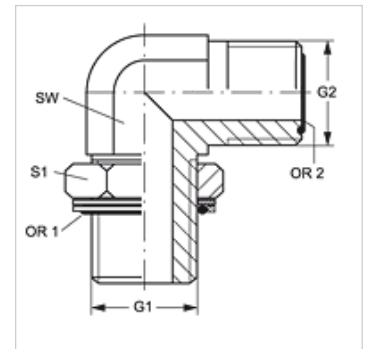

## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

Identification	G1	G2	AF (mm)	S1	OR1	OR2
W90 HROK 04 HJOF VA	G 1/4" -19	9/16"-18 UNF	19	19	10.77 x 2.62	7.65 x 1.78
W90 HROK 06 HJOF VA	G 3/8" -19	11/16" -16 UN	19	22	13.94 x 2.62	9.25 x 1.78
W90 HROK 08 HJOF VA	G 1/2" -14	13/16" -16 UN	27	27	17.86 x 2.62	12.42 x 1.78
W90 HROK 12 HJOF VA	G 3/4" -14	1.3/16" -12 UN	30	36	23.47 x 2.62	18.77 x 1.78
W90 HROK 16 HJOF VA	G 1" -11	1.7/16" -12 UN	36	41	29.75 x 3.53	23.52 x 1.78

SW, S1, S2 = With across flats

## Product versions

W90 HROK HJOF Screw-in socket, angle 90°, Steel

## Spare parts

KAMMRING G Spacer diaphragm ring, imperial