

W90 HRO L HJ

Screw-in socket, long, angle 90°

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 form G

Connection 2 UN/UNF external threads


Sealing form 2 74° outer cone

Design Screw-in socket, long

Construction Angle 90°

Material Steel

Surface electro galvanised

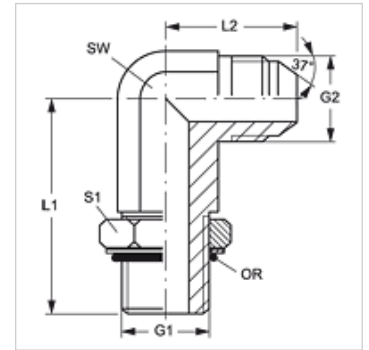

Item

| Identification | G1 | G2 | AF (mm) | L1 (mm) | L2 (mm) | S1 | OR |
|--------------------|------------|----------------|------------|------------|------------|----|--------------|
| W90 HRO L 04 HJ 06 | G 1/4" -19 | 9/16"-18 UNF | 14 | 56,5 | 27,0 | 19 | 8.00 x 2.00 |
| W90 HRO L 04 HJ 08 | G 1/4" -19 | 3/4"-16 UNF | 19 | 64,0 | 31,5 | 19 | 8.00 x 2.00 |
| W90 HRO L 06 HJ | G 3/8" -19 | 9/16"-18 UNF | 19 | 67,0 | 28,5 | 22 | 13.94 x 2.62 |
| W90 HRO L 06 HJ 08 | G 3/8" -19 | 3/4"-16 UNF | 19 | 67,0 | 31,5 | 22 | 13.94 x 2.62 |
| W90 HRO L 06 HJ 10 | G 3/8" -19 | 7/8"-14 UNF | 22 | 75,0 | 36,5 | 22 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 06 | G 1/2" -14 | 9/16"-18 UNF | 22 | 78,0 | 31,0 | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ | G 1/2" -14 | 3/4"-16 UNF | 22 | 78,0 | 34,0 | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 10 | G 1/2" -14 | 7/8"-14 UNF | 22 | 78,0 | 36,5 | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 27 | 88,0 | 42,0 | 27 | 17.86 x 2.62 |
| W90 HRO L 12 HJ 10 | G 3/4" -14 | 7/8"-14 UNF | 27 | 92,0 | 39,5 | 36 | 23.47 x 2.62 |
| W90 HRO L 12 HJ | G 3/4" -14 | 1.1/16" -12 UN | 27 | 92,0 | 42,0 | 36 | 23.47 x 2.62 |
| W90 HRO L 12 HJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 33 | 105,0 | 46,0 | 36 | 23.47 x 2.62 |
| W90 HRO L 16 HJ 12 | G 1" -11 | 1.1/16" -12 UN | 33 | 105,0 | 44,5 | 41 | 29.74 x 3.53 |
| W90 HRO L 16 HJ | G 1" -11 | 1.5/16" -12 UN | 33 | 105,0 | 46,0 | 41 | 29.74 x 3.53 |
| W90 HRO L 16 HJ 20 | G 1" -11 | 1.5/8" -12 UN | 41 | 124,0 | 52,0 | 41 | 29.74 x 3.53 |

SW, S1, S2 = With across flats