


# W90 O AN

Screw-in socket, DKN, angle 90°

## Properties

<b>Connection 1</b>	UN/UNF external threads
<b>Sealing form 1</b>	O-ring seal on screw-in socket
<b>Connection 2</b>	NPSM nut thread
<b>Sealing form 2</b>	60° outer cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	Angle 90°
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

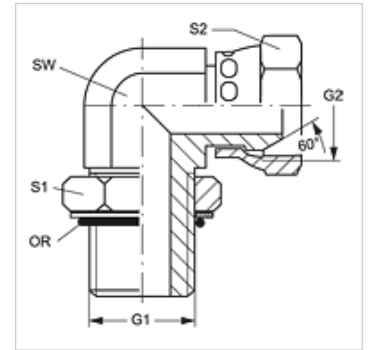

## Item

Identification	G1	G2	AF (mm)	S1	S2	OR
<b>W90 O 04 AN</b>	7/16"-20 UNF	1/4" -18 NPT	11	14	18	8.92 x 1.83
<b>W90 O 06 AN 04</b>	9/16"-18 UNF	1/4" -18 NPT	14	18	18	11.90 x 1.98
<b>W90 O 06 AN</b>	9/16"-18 UNF	3/8" -18 NPT	14	18	25	11.90 x 1.98
<b>W90 O 08 AN</b>	3/4"-16 UNF	1/2" -14 NPT	19	22	25	16.36 x 2.20
<b>W90 O 08 AN 12</b>	3/4"-16 UNF	3/4" -14 NPT	19	22	32	16.36 x 2.20
<b>W90 O 10 AN 06</b>	7/8" -14 UNF	3/8" -18 NPT	22	25	22	19.18 x 2.46
<b>W90 O 10 AN 08</b>	7/8" -14 UNF	1/2" -14 NPT	22	25	25	19.18 x 2.46
<b>W90 O 10 AN 12</b>	7/8" -14 UNF	3/4" -14 NPT	22	25	32	19.18 x 2.46
<b>W90 O 12 AN 08</b>	1.1/16" -12 UN	1/2" -14 NPT	27	32	25	23.47 x 2.95
<b>W90 O 12 AN</b>	1.1/16" -12 UN	3/4" -14 NPT	27	32	32	23.47 x 2.95
<b>W90 O 16 AN</b>	1.5/16" -12 UN	1" -11.5 NPT	33	38	38	29.74 x 2.95

SW, S1, S2 = With across flats