


DRV 1700

Regulating check valve DVR 1700

HANSA FLEX

Properties

| | |
|--------------------|------------------|
| Scope of supply | with counter nut |
| Media | Mineral oil |
| Operating pressure | max. 210 bar |

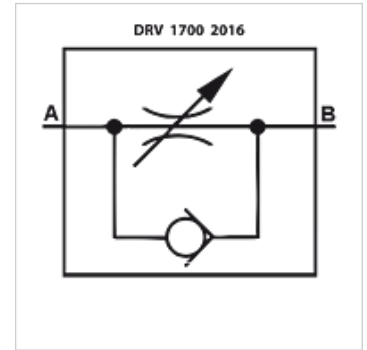

Note

These valves must be set according to the application.

Item

| Identification | Flow rate max. (L/min) | G1 | A (mm) | B (mm) | C (mm) | Weight (kg) |
|----------------|---------------------------|------------|-----------|-----------|-----------|----------------|
| DRV 1700-1/4 | 15 | G 1/4" -19 | 56 | 60 | 17 | 0,15 |
| DRV 1700-3/8 | 30 | G 3/8" -19 | 65 | 73 | 22 | 0,28 |
| DRV 1700-1/2 | 50 | G 1/2" -14 | 87 | 85 | 27 | 0,52 |