


# DV IR

## Throttle valve DV IR

### Properties

<b>Design</b>	Series EVN
<b>Scope of supply</b>	with counter nut
<b>Material</b>	Gasket: NBR
<b>Temp. max.</b>	100 °C
<b>Media</b>	Mineral oil
<b>Operating pressure</b>	max. 210 bar

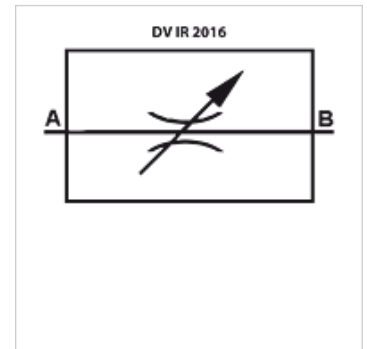

### Note

These valves must be set according to the application.

### Ordering information

Seal: FPM (Viton) up to + 200°C on request.

### Item

Identification	Flow rate max. (L/min)	A (mm)	B (mm)	C (mm)	G1	Weight (kg)
DV 06 IR	15	46	60	17	G 1/4" -19	0,13
DV 10 IR	30	42	73	22	G 3/8" -19	0,25
DV 13 IR	50	57	85	27	G 1/2" -14	0,48