
DV IR

Throttle valve DV IR

Properties

Design	Series EVN
Scope of supply	with counter nut
Material	Gasket: NBR
Temp. max.	100 °C
Media	Mineral oil
Operating pressure	max. 210 bar



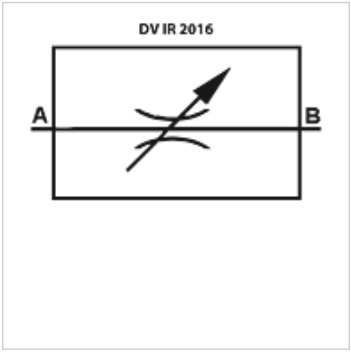

Note

These valves must be set according to the application.

Ordering information

Seal: FPM (Viton) up to + 200°C on request.

Item

Identification	Flow rate max. (L/min)	A (mm)	B (mm)	C (mm)	G1	Weight (kg)
DV 06 IR	15	46	60	17	G 1/4" -19	0,13
DV 10 IR	30	42	73	22	G 3/8" -19	0,25
DV 13 IR	50	57	85	27	G 1/2" -14	0,48

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.