


Properties

| | |
|---------------------------|--|
| Connection 1 - 3 | metric cylindrical outer thread |
| Sealing form 1 - 3 | 24° inner cone |
| Standard | DIN 3865 |
| Construction | T shaped |
| Design | Shuttle valve, connector |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Steel |
| Surface | electro galvanised |

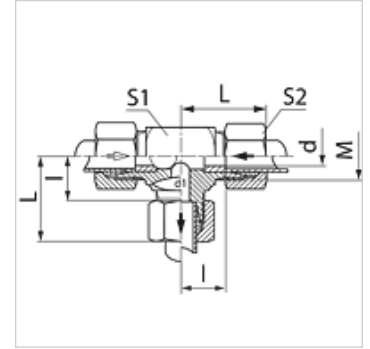

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Description

With two lockable inlets and one outlet.

Item

| Identification | Series | Operating pressure | External pipe Ø (mm) | M | d (mm) | l (mm) | L (mm) | S1 | S2 |
|----------------|--------|--------------------|----------------------|------------|--------|--------|--------|----|----|
| WV NW 06 HL | L | PN 160 | 8 | M 14 x 1.5 | 4,5 | 14,0 | 29 | 14 | 17 |
| WV NW 08 HL | L | PN 160 | 10 | M 16 x 1.5 | 6,0 | 15,0 | 30 | 17 | 19 |
| WV NW 10 HL | L | PN 160 | 12 | M 18 x 1.5 | 7,5 | 17,0 | 32 | 19 | 22 |
| WV NW 13 HL | L | PN 160 | 15 | M 22 x 1.5 | 10,0 | 21,0 | 36 | 19 | 27 |
| WV NW 03 HS | S | PN 400 | 6 | M 14 x 1.5 | 3,0 | 16,0 | 31 | 14 | 17 |
| WV NW 04 HS | S | PN 400 | 8 | M 16 x 1.5 | 4,5 | 17,0 | 32 | 17 | 19 |
| WV NW 06 HS | S | PN 400 | 10 | M 18 x 1.5 | 6,0 | 17,5 | 34 | 19 | 22 |
| WV NW 08 HS | S | PN 400 | 12 | M 20 x 1.5 | 7,5 | 21,5 | 38 | 22 | 24 |
| WV NW 13 HS | S | PN 400 | 16 | M 24 x 1.5 | 10,0 | 24,5 | 43 | 24 | 30 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure

Product versions

XWV Shuttle valve, connector, Socket (without union nut and cutting ring)