
XWV
Shuttle valve, connector

Properties

Connection 1 - 3	metric cylindrical outer thread
Sealing form 1 - 3	24° inner cone
Construction	T shaped
Design	Shuttle valve, connector
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised



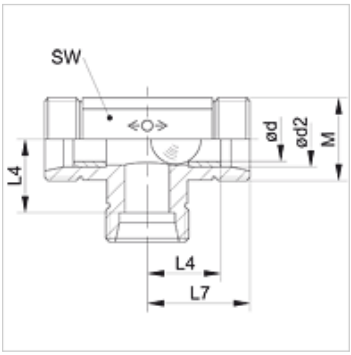

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Description

With two lockable inlets and one outlet.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	M	Ø d (mm)	L4 (mm)	L7 (mm)	S1
XWV NW 06 HL	L	PN 160	8	M 14 x 1.5	4,5	14,0	21	14
XWV NW 08 HL	L	PN 160	10	M 16 x 1.5	6,0	15,0	22	17
XWV NW 10 HL	L	PN 160	12	M 18 x 1.5	7,5	17,0	24	19
XWV NW 13 HL	L	PN 160	15	M 22 x 1.5	10,0	21,0	28	19
XWV NW 03 HS	S	PN 400	6	M 14 x 1.5	3,0	16,0	24	14
XWV NW 04 HS	S	PN 400	8	M 16 x 1.5	4,5	17,0	24	17
XWV NW 06 HS	S	PN 400	10	M 18 x 1.5	6,0	17,5	25	19
XWV NW 13 HS	S	PN 400	16	M 24 x 1.5	7,5	21,5	30	22

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

WV	Shuttle valve, connector, Socket with union nut and cutting ring

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.