


AFS SCHR U

UNC screw set, hexagon socket

HANSA FLEX

Properties

Design	Screw set
Standard	ASA B 18.3
Scope of supply	4 screws + 4 lock washers
Material	Steel
Surface	black oiled

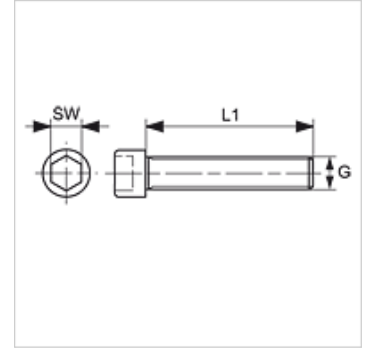

Item

Identification	G1	L1 (mm)	AF
AFS 80 SCHR U	5/16" x 1.1/4" UNC	31,8	7/32"
AFS 100 SCHR U	3/8" x 1.1/2" UNC	38,1	5/16"
AFS 104 SCHR U	7/16" x 1.1/2" UNC	38,1	5/16"
AFS 106 SCHR U	1/2" x 1.3/4" UNC	44,5	3/8"
AFS 112 SCHR U	5/8" x 2" UNC	50,8	1/2"
AFS 403 SCHR U	7/16" x 1.3/4" UNC	44,5	5/16"
AFS 406 SCHR U	3/4" x 2.1/2" UNC	63,5	9/16"

AF = Width across flats

Accessory for following products

FH (3000 PSI)	SAE flange half
FH (6000 PSI)	SAE flange half
VF (3000 PSI)	SAE full flange
VF (6000 PSI)	SAE full flange