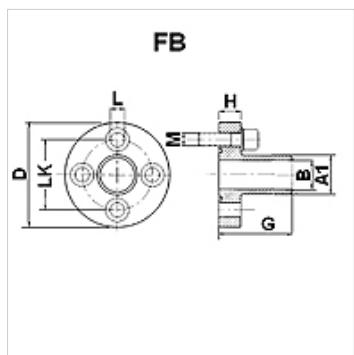


**Properties**

|                 |                                  |
|-----------------|----------------------------------|
| Design          | Pump connection (4 hole)         |
| Construction    | straight                         |
| Mounting        | with metric screw set            |
| Scope of supply | with metric screw set and O-ring |
| Material        | Steel ST 42.3                    |
| Surface         | electro galvanised               |

**Note**

The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

**Item**

| Identification | Pressure PB<br>(bar) | LK<br>(mm) | A1<br>(mm) | Ø B<br>(mm) | D<br>(mm) | G<br>(mm) | H<br>(mm) | L<br>(mm) | Screws          | OR           |
|----------------|----------------------|------------|------------|-------------|-----------|-----------|-----------|-----------|-----------------|--------------|
| <b>FB 1</b>    | 250                  | 30         | 19,0       | 14,0        | 45        | 55        | 10        | 6,5       | (4 x) M 6 x 20  | 18.77 x 1.78 |
| <b>FB 2</b>    | 250                  | 40         | 25,4       | 19,0        | 58        | 60        | 12        | 8,5       | (4 x) M 8 x 25  | 25.12 x 1.78 |
| <b>FB 3 B</b>  | 250                  | 56         | 32,0       | 24,5        | 76        | 72        | 16        | 10,5      | (4 x) M 10 x 35 | 31.42 x 2.62 |

PN = Nominal pressure PB = Max. operating pressure