
WF LK

Pump connection (4 hole), angle 90°

Properties

Design	Pump connection (4 hole)
Construction	Angle 90°
Standard	DIN 3901/3902
Mounting	with metric screw set
Scope of supply	with metric screw set and O-ring
Material	Malleable cast iron GTW 40
Surface	electro galvanised



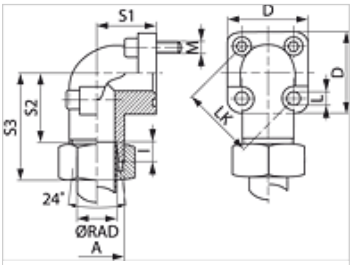

Note

The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

Item

Identification	Series	I (mm)	Ø RAD (mm)	Pressure PB (bar)	A	LK (mm)	D (mm)	S1 (mm)	S2 (mm)	L (mm)	Screws 1	Screws 2	OR
WF 35 LK L 10 315	L	14,0	10	315	M16x1,5	35	39	16,5	30,5	6,4	(2x) M 6 x 22	(2x) M 6 x 35	20.0 x 2.5
WF 35 LK L 12 315	L	14,0	12	315	M18x1,5	35	39	16,5	30,5	6,4	(2x) M 6 x 22	(2x) M 6 x 35	20.0 x 2.5
WF 35 LK L 15 250	L	14,0	15	250	M22x1,5	35	39	16,5	30,0	6,4	(2x) M 6 x 22	(2x) M 6 x 35	20.0 x 2.5
WF 35 LK L 18 250	L	15,0	18	250	M26x1,5	35	39	20,0	30,0	6,4	(2x) M 6 x 22	(2x) M 6 x 40	20.0 x 2.5
WF 40 LK L 15 100	L	20,0	15	100	M22x1,5	40	42	22,5	30,0	6,4	(2x) M 6 x 22	(2x) M 6 x 45	26.0 x 2.5
WF 40 LK L 18 100	L	20,0	18	100	M26x1,5	40	42	22,5	30,5	6,4	(2x) M 6 x 22	(2x) M 6 x 45	26.0 x 2.5
WF 40 LK L 22 100	L	20,0	22	100	M30x2	40	42	22,5	30,5	6,4	(2x) M 6 x 22	(2x) M 6 x 45	26.0 x 2.5
WF 40 LK L 28 100	L	20,0	28	100	M36x2	40	42	28,0	32,5	6,4	(2x) M 6 x 22	(2x) M 6 x 50	26.0 x 2.5
WF 40 LK L 35 100	L	20,0	35	100	M45x2	40	42	34,0	30,5	6,4	(2x) M 6 x 22	(2x) M 6 x 60	26.0 x 2.5
WF 55 LK L 35 100	L	26,0	35	100	M45x2	55	58	32,0	38,5	8,4	(2x) M 8 x 25	(2x) M 8 x 60	32.0 x 2.5
WF 55 LK L 42 100	L	26,0	42	100	M52x2	55	58	40,0	38,0	8,4	(2x) M 8 x 25	(2x) M 8 x 70	32.0 x 2.5
WF 35 LK S 16 315	S	15,0	16	315	M24x1,5	35	39	20,0	29,5	6,4	(2x) M 6 x 22	(2x) M 6 x 40	20.0 x 2.5
WF 35 LK S 20 315	S	15,0	20	315	M30x2	35	39	25,0	34,5	6,4	(2x) M 6 x 22	(2x) M 6 x 45	20.0 x 2.5
WF 40 LK S 20 250	S	20,0	20	250	M30x2	40	42	22,5	29,5	6,4	(2x) M 6 x 22	(2x) M 6 x 45	26.0 x 2.5
WF 55 LK S 20 250	S	18,0	20	250	M30x2	55	58	30,0	34,5	8,4	(2x) M 8 x 25	(2x) M 8 x 55	32.0 x 2.5
WF 55 LK S 25 250	S	20,0	25	250	M36x2	55	58	30,0	37,0	8,4	(2x) M 8 x 25	(2x) M 8 x 55	32.0 x 2.5
WF 55 LK S 30 250	S	26,0	30	250	M42x2	55	58	32,0	35,5	8,4	(2x) M 8 x 25	(2x) M 8 x 50	32.0 x 2.5

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø RAD = External pipe diameter

Product versions

WF LK M Pump connection (4 hole), angle 90°, with screw set, O-ring, nut and cutting ring

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.