
# WF LK 3

Pump connection (3 hole), angle 90°

## Properties

| | |
|---|---|
| **Design** | Pump connection (3 hole) |
| **Construction** | Angle 90° |
| **Mounting** | with metric screw set |
| **Scope of supply** | with metric screw set and O-ring |
| **Material** | Malleable cast iron GTW 40 |
| **Surface** | electro galvanised |



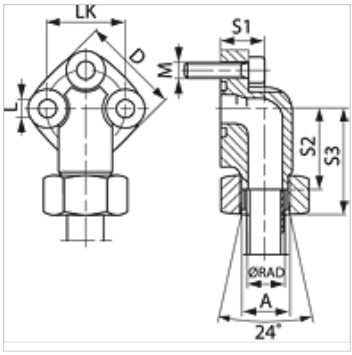


## Note

The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

## Item

| Identification | Series | Ø RAD (mm) | Pressure PB (bar) | LK (mm) | A | D (mm) | S1 (mm) | S2 (mm) | S3 (mm) | L (mm) | Screws | OR |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **WF 30 LK L 12-3** | L | 12 | 250 | 30 | M18x1,5 | 38 | 19 | 30,0 | 46,5 | 6,4 | (3 x) M 6 x 25 | 16.0 x 2.5 |
| **WF 30 LK L 15-3** | L | 15 | 250 | 30 | M22x1,5 | 38 | 19 | 30,0 | 46,0 | 6,4 | (3 x) M 6 x 25 | 16.0 x 2.5 |
| **WF 40 LK L 22-3** | L | 22 | 160 | 40 | M30x2 | 48 | 25 | 35,5 | 52,5 | 8,4 | (3 x) M 8 x 30 | 24.0 x 2.5 |
| **WF 40 LK L 28-3** | L | 28 | 160 | 40 | M36x2 | 48 | 25 | 35,5 | 52,5 | 8,4 | (3 x) M 8 x 30 | 24.0 x 2.5 |

Series: LL = Very light  L = Light  S = Heavy – PN = Nominal pressure  PB = Max. operating pressure – Ø RAD = External pipe diameter

## Product versions

| | |
|---|---|
| **WF LK 3 M** | Pump connection (3 hole), angle 90°, with screw set, O-ring, nut and cutting ring |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*