
VOM
Pre-assembly sockets

HANSA-FLEX

Properties

Design	Pre-assembly sockets
Material	Hardened tool steel
Surface	phosphate treated



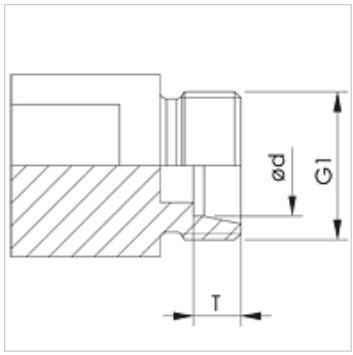

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Description

for manual fitting

Item

Identification	Series	Ø d (mm)	G1	T +/- 0.05 (mm)
VOM 04 LL	LL	4	M 8 x 1	4,0
VOM 06 LL	LL	6	M 10 x 1	5,5
VOM 08 LL	LL	8	M 12 x 1	5,5
VOM 10 LL	LL	10	M 14 x 1	7,0
VOM 12 LL	LL	12	M 16 x 1	7,0
VOM NW 04 HL	L	6	M 12 x 1.5	7,0
VOM NW 06 HL	L	8	M 14 x 1.5	7,0
VOM NW 08 HL	L	10	M 16 x 1.5	7,0
VOM NW 10 HL	L	12	M 18 x 1.5	7,0
VOM NW 13 HL	L	15	M 22 x 1.5	7,0
VOM NW 16 HL	L	18	M 26 x 1.5	7,5
VOM NW 20 HL	L	22	M 30 x 2	7,5
VOM NW 25 HL	L	28	M 36 x 2	7,5
VOM NW 32 HL	L	35	M 45 x 2	10,5
VOM NW 40 HL	L	42	M 52 x 2	11,0
VOM NW 03 HS	S	6	M 14 x 1.5	7,0
VOM NW 04 HS	S	8	M 16 x 1.5	7,0
VOM NW 06 HS	S	10	M 18 x 1.5	7,5
VOM NW 08 HS	S	12	M 20 x 1.5	7,5
VOM NW 10 HS	S	14	M 22 x 1.5	8,0
VOM NW 13 HS	S	16	M 24 x 1.5	8,5
VOM NW 16 HS	S	20	M 30 x 2	10,5
VOM NW 20 HS	S	25	M 36 x 2	12,0
VOM NW 25 HS	S	30	M 42 x 2	13,5
VOM NW 32 HS	S	38	M 52 x 2	16,0

Series: LL = Very light L = Light S = Heavy

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.