

# BZL / BZS MG

Lock without union nut

**HANSA FLEX**

## Properties


**Sealing form 1** 24° outer cone with O-ring

**Design** Lock without union nut

**Construction** straight

**Standard** DIN 2353  
ISO 8434-1

**Material** Brass

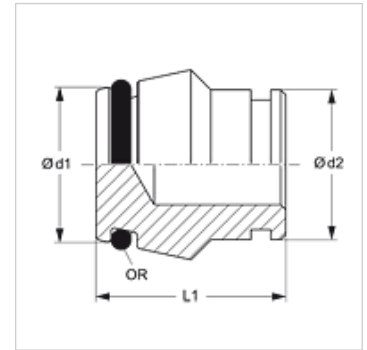

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	$\varnothing d1$ (mm)	$\varnothing d2$ (mm)	$L1$ (mm)	OR
BZL NW 04 MG	L	PN 200	6,6	6	18,5	4.0 x 1.5
BZL NW 06 MG	L	PN 200	8,5	8	18,0	6.0 x 1.5
BZL NW 08 MG	L	PN 200	10,6	10	19,5	7.5 x 1.5
BZL NW 10 MG	L	PN 200	12,6	12	19,0	9.0 x 1.5
BZL NW 13 MG	L	PN 200	15,5	15	19,0	12.0 x 2.0
BZL NW 16 MG	L	PN 200	18,6	18	22,0	15.0 x 2.0
BZL NW 20 MG	L	PN 100	22,6	22	22,0	20.0 x 2.0
BZL NW 25 MG	L	PN 100	28,5	28	23,5	26.0 x 2.0
BZS NW 10 MG	S	PN 400	14,5	14	21,0	10.0 x 2.0
BZS NW 13 MG	S	PN 250	16,5	16	22,0	12.0 x 2.0
BZS NW 16 MG	S	PN 250	20,9	20	26,5	16.3 x 2.4
BZS NW 20 MG	S	PN 250	25,9	25	27,5	20.3 x 2.4

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure –  $\varnothing$  = External pipe diameter

## Product versions

**BZL / BZS** Lock without union nut, Steel

**BZL VA / BZS VA** Lock without union nut, Stainless steel