

BZL / BZS MG

Lock without union nut

HANSA FLEX

Properties


Sealing form 1 24° outer cone with O-ring

Design Lock without union nut

Construction straight

Standard DIN 2353
ISO 8434-1

Material Brass

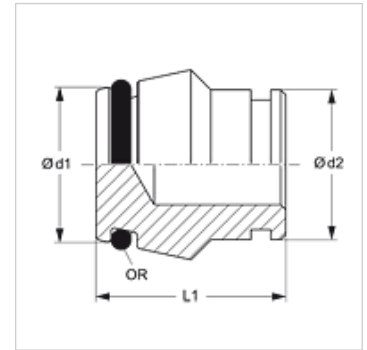

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d1 (mm) | Ø d2 (mm) | L1 (mm) | OR |
|----------------|--------|--------------------|--------------|--------------|------------|------------|
| BZL NW 04 MG | L | PN 200 | 6,6 | 6 | 18,5 | 4.0 x 1.5 |
| BZL NW 06 MG | L | PN 200 | 8,5 | 8 | 18,0 | 6.0 x 1.5 |
| BZL NW 08 MG | L | PN 200 | 10,6 | 10 | 19,5 | 7.5 x 1.5 |
| BZL NW 10 MG | L | PN 200 | 12,6 | 12 | 19,0 | 9.0 x 1.5 |
| BZL NW 13 MG | L | PN 200 | 15,5 | 15 | 19,0 | 12.0 x 2.0 |
| BZL NW 16 MG | L | PN 200 | 18,6 | 18 | 22,0 | 15.0 x 2.0 |
| BZL NW 20 MG | L | PN 100 | 22,6 | 22 | 22,0 | 20.0 x 2.0 |
| BZL NW 25 MG | L | PN 100 | 28,5 | 28 | 23,5 | 26.0 x 2.0 |
| BZS NW 10 MG | S | PN 400 | 14,5 | 14 | 21,0 | 10.0 x 2.0 |
| BZS NW 13 MG | S | PN 250 | 16,5 | 16 | 22,0 | 12.0 x 2.0 |
| BZS NW 16 MG | S | PN 250 | 20,9 | 20 | 26,5 | 16.3 x 2.4 |
| BZS NW 20 MG | S | PN 250 | 25,9 | 25 | 27,5 | 20.3 x 2.4 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter

Product versions

BZL / BZS Lock without union nut, Steel

BZL VA / BZS VA Lock without union nut, Stainless steel