


Properties

| | |
|-----------------------|----------------------------|
| Connection 1 | metric nut thread |
| Sealing form 1 | 24° outer cone with O-ring |
| Design | Blanking nut |
| Construction | straight |
| Standard | DIN 2353 ISO 8434-1 |
| Material | Steel |
| Surface | electro galvanised |

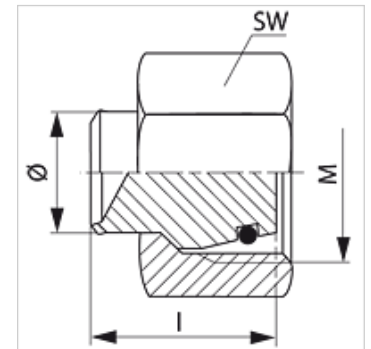

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | External pipe Ø (mm) | M | l (mm) | AF (mm) | OR |
|----------------|--------|--------------------|-------------------------|------------|-----------|------------|------------|
| VLM NW 04 | L | PN 400 | 6 | M 12 x 1.5 | 18,5 | 14 | 4.0 x 1.5 |
| VLM NW 06 | L | PN 400 | 8 | M 14 x 1.5 | 18,0 | 17 | 6.0 x 1.5 |
| VLM NW 08 | L | PN 400 | 10 | M 16 x 1.5 | 19,5 | 19 | 7.5 x 1.5 |
| VLM NW 10 | L | PN 400 | 12 | M 18 x 1.5 | 19,0 | 22 | 9.0 x 1.5 |
| VLM NW 13 | L | PN 400 | 15 | M 22 x 1.5 | 19,0 | 27 | 12.0 x 2.0 |
| VLM NW 16 | L | PN 315 | 18 | M 26 x 1.5 | 22,0 | 32 | 15.0 x 2.0 |
| VLM NW 20 | L | PN 315 | 22 | M 30 x 2 | 22,0 | 36 | 20.0 x 2.0 |
| VLM NW 25 | L | PN 250 | 28 | M 36 x 2 | 23,5 | 41 | 26.0 x 2.0 |
| VLM NW 32 | L | PN 250 | 35 | M 45 x 2 | 27,0 | 50 | 32.0 x 2.5 |
| VLM NW 40 | L | PN 250 | 42 | M 52 x 2 | 27,5 | 60 | 38.0 x 2.5 |
| VSM NW 03 | S | PN 630 | 6 | M 14 x 1.5 | 18,5 | 17 | 4.0 x 1.5 |
| VSM NW 04 | S | PN 630 | 8 | M 16 x 1.5 | 18,0 | 19 | 6.0 x 1.5 |
| VSM NW 06 | S | PN 630 | 10 | M 18 x 1.5 | 19,5 | 22 | 7.5 x 1.5 |
| VSM NW 08 | S | PN 630 | 12 | M 20 x 1.5 | 19,0 | 24 | 9.0 x 1.5 |
| VSM NW 10 | S | PN 630 | 14 | M 22 x 1.5 | 21,0 | 27 | 10.0 x 2.0 |
| VSM NW 13 | S | PN 400 | 16 | M 24 x 1.5 | 22,0 | 30 | 12.0 x 2.0 |
| VSM NW 16 | S | PN 400 | 20 | M 30 x 2 | 26,5 | 36 | 16.0 x 2.5 |
| VSM NW 20 | S | PN 400 | 25 | M 36 x 2 | 27,5 | 46 | 20.0 x 2.5 |
| VSM NW 25 | S | PN 400 | 30 | M 42 x 2 | 28,5 | 50 | 25.0 x 2.5 |
| VSM NW 32 | S | PN 315 | 38 | M 52 x 2 | 32,5 | 60 | 33.0 x 2.5 |

PN = Nominal pressure PB = Max. operating pressure - Series: LL = Very light L = Light S = Heavy - Ø = External pipe diameter

Product versions

VLM VA / VSM VA Blanking nut, Stainless steel