


SW MG

Bulkhead fitting, angle 90

Properties

| | |
|---------------------------|--|
| Connection 1 + 2 | metric cylindrical outer thread |
| Sealing form 1 + 2 | 24° inner cone |
| Design | Bulkhead fitting |
| Construction | Angle 90° |
| Standard | DIN 2353 ISO 8434-1 |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Brass |

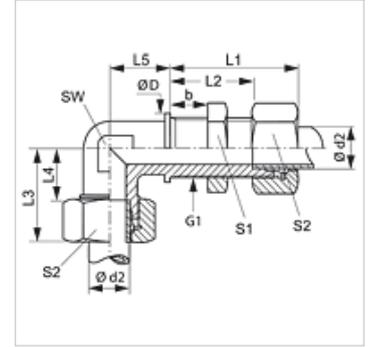

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | Ø D (mm) | b (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | AF (mm) | S1 | S2 |
|----------------|--------|--------------------|-----------|------------|----------|--------|---------|---------|---------|---------|---------|---------|----|----|
| SW NW 04 HL MG | L | PN 200 | 6 | M 12 x 1.5 | 17 | 16 | 42 | 27,0 | 27 | 12,0 | 14 | 12 | 17 | 14 |
| SW NW 06 HL MG | L | PN 200 | 8 | M 14 x 1.5 | 19 | 16 | 42 | 27,0 | 29 | 14,0 | 17 | 12 | 19 | 17 |
| SW NW 08 HL MG | L | PN 200 | 10 | M 16 x 1.5 | 22 | 16 | 43 | 28,0 | 30 | 15,0 | 18 | 14 | 22 | 19 |
| SW NW 10 HL MG | L | PN 200 | 12 | M 18 x 1.5 | 24 | 16 | 44 | 29,0 | 32 | 17,0 | 20 | 17 | 24 | 22 |
| SW NW 13 HL MG | L | PN 200 | 15 | M 22 x 1.5 | 27 | 16 | 46 | 31,0 | 36 | 21,0 | 23 | 19 | 30 | 27 |
| SW NW 16 HL MG | L | PN 200 | 18 | M 26 x 1.5 | 32 | 16 | 49 | 32,5 | 40 | 23,5 | 24 | 24 | 36 | 32 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

SW

SW VA