


# SWM VA

Banjo fitting, angle 90°

**HANSA FLEX**

## Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	Edge sealing ring
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	24° inner cone
<b>Design</b>	Banjo fitting
<b>Construction</b>	Angle 90°
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket with union nut and cutting ring
<b>Material</b>	Stainless steel

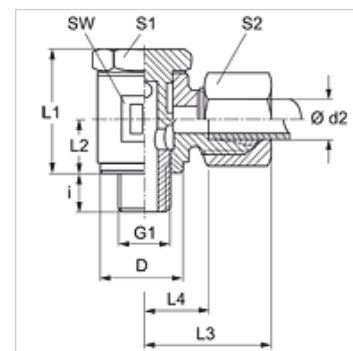

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	D (mm)	i (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	AF (mm)	S1	S2
<b>SWM NW 04 HL VA</b>	L	PN 250	6	M 10 x 1	14,5	6,0	21,5	10	25	11,0	14	14	14
<b>SWM NW 06 HL VA</b>	L	PN 250	8	M 12 x 1.5	18,5	9,0	27,5	13	27	14,0	17	19	17
<b>SWM NW 08 HL VA</b>	L	PN 250	10	M 14 x 1.5	18,5	9,0	27,5	13	27	13,5	19	19	19
<b>SWM NW 10 HL VA</b>	L	PN 250	12	M 16 x 1.5	21,5	9,0	34,0	16	30	16,0	22	22	22
<b>SWM NW 03 HS VA</b>	S	PN 250	6	M 12 x 1.5	18,5	9,0	27,5	13	28	14,5	17	19	17
<b>SWM NW 04 HS VA</b>	S	PN 250	8	M 14 x 1.5	18,5	9,0	27,5	13	29	14,5	19	19	19
<b>SWM NW 06 HS VA</b>	S	PN 250	10	M 16 x 1.5	22,5	9,0	34,0	16	33	15,5	22	22	22
<b>SWM NW 08 HS VA</b>	S	PN 250	12	M 18 x 1.5	23,5	9,0	34,0	16	34	15,5	24	22	24

PN = Nominal pressure PB = Max. operating pressure – Series: LL = Very light L = Light S = Heavy – Ø d2 = External pipe diameter

## Product versions

<b>SWM</b>	Banjo fitting, angle 90°, Steel
<b>XSWM VA</b>	Banjo fitting, angle 90°, Stainless steel