


SWR MG

Banjo fitting, angle 90°

HANSA FLEX

Properties

| | |
|------------------------|--|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Edge sealing ring |
| Connection 2 | metric cylindrical outer thread |
| Sealing form 2 | 24° inner cone |
| Design | Banjo fitting |
| Construction | Angle 90° |
| Standard | DIN 2353 ISO 8434-1 |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Brass |

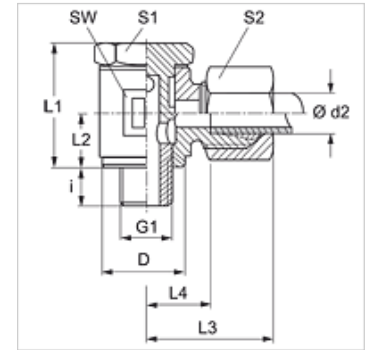

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | D (mm) | i (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | AF (mm) | S1 | S2 |
|------------------------|--------|--------------------|--------------|------------|-----------|-----------|------------|------------|------------|------------|------------|----|----|
| SWR NW 08 HL MG | L | PN 150 | 10 | G 1/4" -19 | 18,5 | 9 | 27,5 | 13 | 29 | 13,5 | 19 | 19 | 19 |

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter