


SWR VA

Banjo fitting, angle 90°

Properties

| | |
|------------------------|----------------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Edge sealing ring |
| Connection 2 | metric cylindrical outer thread |
| Sealing form 2 | 24° inner cone |
| Design | Banjo fitting |
| Construction | Angle 90° |
| Standard | DIN 2353 ISO 8434-1 |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Stainless steel |

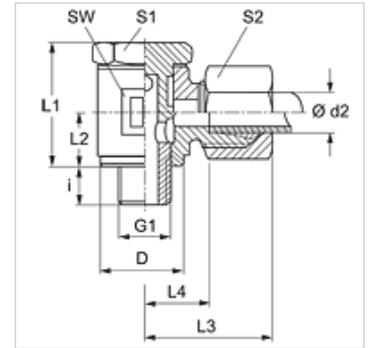

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | D (mm) | i (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | AF (mm) | S1 | S2 |
|-----------------|--------|--------------------|-----------|------------|--------|--------|---------|---------|---------|---------|---------|----|----|
| SWR NW 04 HL VA | L | PN 250 | 6 | G 1/8" -28 | 14,5 | 6 | 21,5 | 10 | 26 | 11,0 | 14 | 14 | 14 |
| SWR NW 06 HL VA | L | PN 250 | 8 | G 1/4" -19 | 18,5 | 9 | 27,5 | 13 | 28 | 14,0 | 19 | 19 | 17 |
| SWR NW 08 HL VA | L | PN 250 | 10 | G 1/4" -19 | 18,5 | 9 | 27,5 | 13 | 29 | 13,5 | 19 | 19 | 19 |
| SWR NW 10 HL VA | L | PN 250 | 12 | G 3/8" -19 | 22,5 | 9 | 34,0 | 16 | 30 | 16,0 | 22 | 22 | 22 |
| SWR NW 13 HL VA | L | PN 250 | 15 | G 1/2" -14 | 26,5 | 11 | 45,0 | 22 | 34 | 19,5 | 30 | 27 | 27 |
| SWR NW 16 HL VA | L | PN 160 | 18 | G 1/2" -14 | 26,0 | 11 | 44,0 | 21 | 36 | 19,5 | 30 | 27 | 32 |
| SWR NW 20 HL VA | L | PN 160 | 22 | G 3/4" -14 | 32,0 | 13 | 48,0 | 23 | 42 | 25,5 | 36 | 32 | 36 |
| SWR NW 03 HS VA | S | PN 250 | 6 | G 1/4" -19 | 18,5 | 9 | 27,5 | 23 | 30 | 14,5 | 19 | 19 | 17 |
| SWR NW 04 HS VA | S | PN 250 | 8 | G 1/4" -19 | 18,5 | 9 | 27,5 | 13 | 30 | 14,5 | 19 | 19 | 19 |
| SWR NW 06 HS VA | S | PN 250 | 10 | G 3/8" -19 | 22,5 | 9 | 34,0 | 16 | 33 | 15,5 | 22 | 22 | 22 |
| SWR NW 08 HS VA | S | PN 250 | 12 | G 3/8" -19 | 22,5 | 9 | 34,0 | 16 | 33 | 15,5 | 22 | 22 | 24 |
| SWR NW 13 HS VA | S | PN 250 | 16 | G 1/2" -14 | 26,0 | 11 | 44,0 | 21 | 39 | 19,0 | 30 | 27 | 30 |
| SWR NW 16 HS VA | S | PN 250 | 20 | G 3/4" -14 | 32,0 | 13 | 48,0 | 23 | 45 | 22,5 | 36 | 32 | 36 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

| | |
|----------------|-------------------------------------------|
| SWR | Banjo fitting, angle 90°, Steel |
| XSWR VA | Banjo fitting, angle 90°, Stainless steel |