# XDWR VA


Banjo fitting, throttle free, angle 90°

HANSA-FLEX

## Properties

| | |
|---|---|
| **Connection 1** | BSP external thread, cylindrical |
| **Sealing form 1** | Edge sealing ring |
| **Connection 2** | metric cylindrical outer thread |
| **Sealing form 2** | 24° inner cone |
| **Design** | Banjo coupling, throttle free |
| **Construction** | Angle 90° |
| **Standard** | DIN 2353<br>ISO 8434-1 |
| **Scope of supply** | Socket (without union nut and cutting ring) |
| **Material** | Stainless steel |



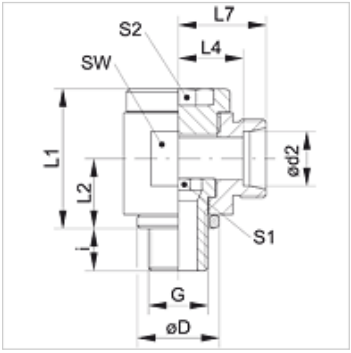


## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G | Ø D (mm) | i (mm) | L1 (mm) | L2 (mm) | L4 (mm) | L7 (mm) | AF (mm) | S1 | S2 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **XDWR NW 04 HL VA** | L | PN 160 | 6 | G 1/8" -28 | 14 | 8 | 24 | 12 | 12,5 | 19 | 19 | 6 | 6 |
| **XDWR NW 06 HL VA** | L | PN 160 | 8 | G 1/4" -19 | 18 | 12 | 30 | 16 | 14,5 | 21 | 22 | 8 | 8 |
| **XDWR NW 08 HL VA** | L | PN 100 | 10 | G 1/4" -19 | 18 | 12 | 30 | 16 | 15,5 | 22 | 22 | 8 | 8 |
| **XDWR NW 10 HL VA** | L | PN 100 | 12 | G 3/8" -19 | 22 | 12 | 37 | 18 | 18,0 | 25 | 27 | 10 | 10 |
| **XDWR NW 13 HL VA** | L | PN 100 | 15 | G 1/2" -14 | 26 | 14 | 42 | 21 | 22,0 | 29 | 32 | 12 | 12 |
| **XDWR NW 16 HL VA** | L | PN 100 | 18 | G 1/2" -14 | 26 | 14 | 46 | 23 | 21,5 | 29 | 36 | 12 | 12 |
| **XDWR NW 20 HL VA** | L | PN 100 | 22 | G 3/4" -14 | 32 | 16 | 58 | 28 | 28,5 | 36 | 46 | 17 | 17 |
| **XDWR NW 25 HL VA** | L | PN 100 | 28 | G 1" -11 | 39 | 18 | 64 | 32 | 31,5 | 39 | 50 | 22 | 22 |
| **XDWR NW 32 HL VA** | L | PN 63 | 35 | G 1.1/4" -11 | 49 | 20 | 76 | 37 | 35,5 | 46 | 60 | 27 | 27 |
| **XDWR NW 40 HL VA** | L | PN 63 | 42 | G 1.1/2" -11 | 55 | 22 | 85 | 42 | 40,0 | 51 | 65 | 32 | 32 |
| | | | | | | | | | | | | | |
| **XDWR NW 03 HS VA** | S | PN 160 | 6 | G 1/4" -19 | 18 | 12 | 30 | 16 | 16,5 | 23 | 22 | 8 | 8 |
| **XDWR NW 04 HS VA** | S | PN 160 | 8 | G 1/4" -19 | 18 | 12 | 30 | 16 | 16,5 | 23 | 22 | 8 | 8 |
| **XDWR NW 06 HS VA** | S | PN 100 | 10 | G 3/8" -19 | 22 | 12 | 37 | 18 | 18,5 | 27 | 27 | 10 | 10 |
| **XDWR NW 08 HS VA** | S | PN 100 | 12 | G 3/8" -19 | 22 | 12 | 37 | 18 | 18,5 | 27 | 27 | 10 | 10 |
| **XDWR NW 10 HS VA** | S | PN 100 | 14 | G 1/2" -14 | 26 | 14 | 42 | 21 | 23,0 | 31 | 32 | 12 | 12 |
| **XDWR NW 13 HS VA** | S | PN 100 | 16 | G 1/2" -14 | 26 | 14 | 46 | 23 | 22,5 | 31 | 36 | 12 | 12 |
| **XDWR NW 16 HS VA** | S | PN 100 | 20 | G 3/4" -14 | 32 | 16 | 58 | 28 | 27,5 | 38 | 46 | 17 | 17 |
| **XDWR NW 20 HS VA** | S | PN 100 | 25 | G 1" -11 | 39 | 18 | 64 | 32 | 31,0 | 43 | 50 | 22 | 22 |
| **XDWR NW 25 HS VA** | S | PN 63 | 30 | G 1.1/4" -11 | 49 | 20 | 76 | 37 | 36,5 | 50 | 60 | 27 | 27 |
| **XDWR NW 32 HS VA** | S | PN 63 | 38 | G 1.1/2" -11 | 55 | 22 | 85 | 42 | 41,0 | 57 | 70 | 32 | 32 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

| | |
|---|---|
| **XDWR** | Banjo fitting, throttle free, angle 90°, Socket (without union nut and cutting ring) |
| **DWR VA** | Banjo fitting, throttle free, angle 90°, Socket with union nut and cutting ring |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*