
XEWOM 45

Screw-in fitting, angle 45°

Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	O-ring seal on screw-in socket
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction screw-in fitting
Construction	Angle 45°
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised



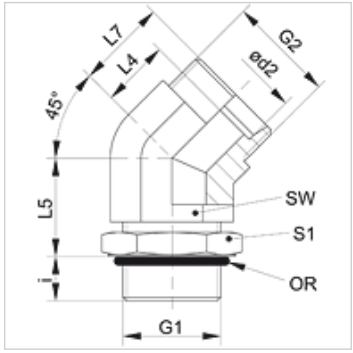

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XEWOM 45 NW 04 HL	L	PN 315	6	M 10 x 1	M 12 x 1.5	8	9	20	16	14	14	8.1 x 1.6
XEWOM 45 NW 06 HL	L	PN 315	8	M 12 x 1.5	M 14 x 1.5	11	12	18	19	14	17	9.3 x 2.4
XEWOM 45 NW 08 HL	L	PN 315	10	M 14 x 1.5	M 16 x 1.5	11	12	22	19	19	19	11.3 x 2.4
XEWOM 45 NW 10 HL	L	PN 315	12	M 16 x 1.5	M 18 x 1.5	11	14	23	21	19	22	13.3 x 2.4
XEWOM 45 NW 13 HL	L	PN 315	15	M 18 x 1.5	M 22 x 1.5	12	17	23	24	22	24	15.3 x 2.4
XEWOM 45 NW 16 HL	L	PN 315	18	M 22 x 1.5	M 26 x 1.5	12	17	30	24	27	27	19.3 x 2.4
XEWOM 45 NW 20 HL 27	L	PN 160	22	M 27 x 2	M 30 x 2	15	19	30	26	30	32	23.6 x 2.9
XEWOM 45 NW 25 HL	L	PN 160	28	M 33 x 2	M 36 x 2	15	23	34	31	36	41	29.5 x 3.0
XEWOM 45 NW 32 HL	L	PN 160	35	M 42 x 2	M 45 x 2	15	27	36	37	50	50	38.0 x 3.0
XEWOM 45 NW 40 HL	L	PN 160	42	M 48 x 2	M 52 x 2	17	26	36	37	50	55	44.5 x 3.0
XEWOM 45 NW 03 HS	S	PN 400	6	M 12 x 1.5	M 14 x 1.5	11	9	18	16	14	17	9.3 x 2.4
XEWOM 45 NW 04 HS	S	PN 400	8	M 14 x 1.5	M 16 x 1.5	11	12	18	19	19	19	11.3 x 2.4
XEWOM 45 NW 06 HS	S	PN 400	10	M 16 x 1.5	M 18 x 1.5	12	13	22	21	19	22	13.3 x 2.4
XEWOM 45 NW 08 HS	S	PN 400	12	M 18 x 1.5	M 20 x 1.5	14	17	23	24	22	24	15.3 x 2.4
XEWOM 45 NW 10 HS	S	PN 400	14	M 20 x 1.5	M 22 x 1.5	14	16	23	24	27	27	17.3 x 2.4
XEWOM 45 NW 13 HS	S	PN 400	16	M 22 x 1.5	M 24 x 1.5	14	16	20	24	27	27	19.3 x 2.4
XEWOM 45 NW 16 HS	S	PN 400	20	M 27 x 2	M 30 x 2	18	16	33	27	30	32	23.6 x 2.9
XEWOM 45 NW 20 HS	S	PN 315	25	M 33 x 2	M 36 x 2	18	19	35	31	36	41	29.5 x 3.0
XEWOM 45 NW 25 HS	S	PN 250	30	M 42 x 2	M 42 x 2	18	24	36	37	50	50	38.0 x 3.0
XEWOM 45 NW 32 HS	S	PN 200	38	M 42 x 2	M 52 x 2	21	21	36	37	50	55	38.0 x 3.0

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

EWOM 45	Screw-in fitting, angle 45°, Socket with union nut and cutting ring

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.