


Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	O-ring and spacer diaphragm ring
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction screw-in fitting
Construction	L shaped
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised

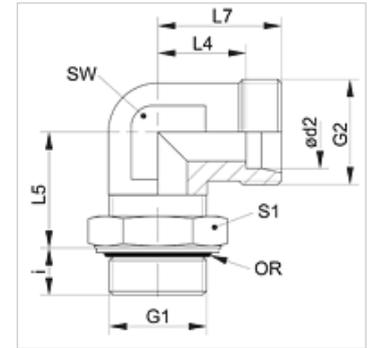

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XEWOMK NW 04 HL	L	PN 315	6	M 10 x 1	M 12 x 1.5	7	14	20	21	14	13	8.1 x 1.6
XEWOMK NW 06 HL	L	PN 315	8	M 12 x 1.5	M 14 x 1.5	10	16	22	23	14	17	9.3 x 2.4
XEWOMK NW 08 HL	L	PN 315	10	M 14 x 1.5	M 16 x 1.5	10	17	24	24	19	17	11.3 x 2.4
XEWOMK NW 10 HL	L	PN 315	12	M 16 x 1.5	M 18 x 1.5	10	19	25	26	19	19	13.3 x 2.4
XEWOMK NW 13 HL	L	PN 315	15	M 18 x 1.5	M 22 x 1.5	11	21	31	28	22	22	15.3 x 2.4
XEWOMK NW 16 HL	L	PN 250	18	M 22 x 1.5	M 26 x 1.5	12	24	33	31	27	27	19.3 x 2.4
XEWOMK NW 20 HL	L	PN 160	22	M 26 x 1.5	M 30 x 2	14	28	36	35	30	32	23.5 x 2.6
XEWOMK NW 20 HL 27	L	PN 160	22	M 27 x 2	M 30 x 2	14	28	36	35	30	32	23.6 x 2.9
XEWOMK NW 25 HL	L	PN 160	28	M 33 x 2	M 36 x 2	14	31	39	38	36	38	29.5 x 3.0
XEWOMK NW 32 HL	L	PN 160	35	M 42 x 2	M 42 x 2	14	38	49	48	50	50	38.0 x 3.0
XEWOMK NW 40 HL	L	PN 160	42	M 48 x 2	M 52 x 2	16	38	50	49	50	55	44.5 x 3.0
XEWOMK NW 03 HS	S	PN 315	6	M 12 x 1.5	M 14 x 1.5	10	15	22	22	14	17	9.3 x 2.4
XEWOMK NW 04 HS	S	PN 315	8	M 14 x 1.5	M 16 x 1.5	10	17	26	24	19	17	11.3 x 2.4
XEWOMK NW 06 HS	S	PN 315	10	M 16 x 1.5	M 18 x 1.5	11	18	27	25	19	19	13.3 x 2.4
XEWOMK NW 08 HS	S	PN 315	12	M 18 x 1.5	M 20 x 1.5	12	22	31	29	22	22	15.3 x 2.4
XEWOMK NW 10 HS	S	PN 250	14	M 20 x 1.5	M 22 x 1.5	14	25	36	33	27	27	17.3 x 2.4
XEWOMK NW 13 HS	S	PN 250	16	M 22 x 1.5	M 24 x 1.5	14	25	36	33	27	27	19.3 x 2.4
XEWOMK NW 16 HS	S	PN 250	20	M 27 x 2	M 30 x 2	16	28	39	38	30	32	23.6 x 2.9
XEWOMK NW 20 HS	S	PN 160	25	M 33 x 2	M 36 x 2	16	30	44	42	36	38	29.5 x 3.0
XEWOMK NW 25 HS	S	PN 160	30	M 42 x 2	M 42 x 2	17	36	51	49	50	50	38.0 x 3.0
XEWOMK NW 32 HS	S	PN 160	38	M 48 x 2	M 52 x 2	19	34	54	50	50	55	44.5 x 3.0

PN = Nominal pressure PB = Max. operating pressure – Series: LL = Very light L = Light S = Heavy – Ø d2 = External pipe diameter

Product versions

EWOMK Screw-in fitting, angle 90°, Socket with union nut and cutting ring