


# XEWOMK 45

Screw-in fitting, angle 45°

## Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	O-ring and spacer diaphragm ring
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	24° inner cone
<b>Design</b>	Adjustable direction screw-in fitting
<b>Construction</b>	Angle 45°
<b>Scope of supply</b>	Socket (without union nut and cutting ring)
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

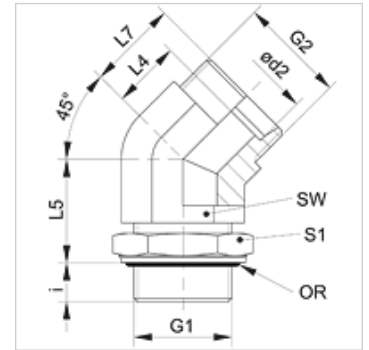

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XEWOMK 45 NW 04 HL	L	PN 315	6	M 10 x 1	M 12 x 1.5	8	9	20	16	14	13	8.1 x 1.6
XEWOMK 45 NW 06 HL	L	PN 315	8	M 12 x 1.5	M 14 x 1.5	11	12	18	19	14	17	9.3 x 2.4
XEWOMK 45 NW 08 HL	L	PN 315	10	M 14 x 1.5	M 16 x 1.5	11	12	22	19	19	17	11.3 x 2.4
XEWOMK 45 NW 10 HL	L	PN 315	12	M 16 x 1.5	M 18 x 1.5	11	14	23	21	19	19	13.3 x 2.4
XEWOMK 45 NW 13 HL	L	PN 315	15	M 18 x 1.5	M 22 x 1.5	12	17	23	24	22	22	15.3 x 2.4
XEWOMK 45 NW 16 HL	L	PN 250	18	M 22 x 1.5	M 26 x 1.5	12	17	30	24	27	27	19.3 x 2.4
XEWOMK 45 NW 20 HL	L	PN 160	22	M 26 x 1.5	M 30 x 2	16	19	30	26	27	32	23.3 x 2.4
XEWOMK 45 NW20 HL27	L	PN 160	22	M 27 x 2	M 30 x 2	15	19	30	26	30	32	23.6 x 2.9
XEWOMK 45 NW 25 HL	L	PN 160	28	M 33 x 2	M 36 x 2	15	23	34	31	36	38	29.5 x 3.0
XEWOMK 45 NW 32 HL	L	PN 160	35	M 42 x 2	M 45 x 2	15	27	36	37	50	50	38.0 x 3.0
XEWOMK 45 NW 40 HL	L	PN 160	42	M 48 x 2	M 52 x 2	17	26	36	37	50	55	44.5 x 3.0
XEWOMK 45 NW 03 HS	S	PN 315	6	M 12 x 1.5	M 14 x 1.5	11	9	18	16	14	17	9.3 x 2.4
XEWOMK 45 NW 04 HS	S	PN 315	8	M 14 x 1.5	M 16 x 1.5	11	12	18	19	19	17	11.3 x 2.4
XEWOMK 45 NW 06 HS	S	PN 315	10	M 16 x 1.5	M 18 x 1.5	12	13	22	21	19	19	13.3 x 2.4
XEWOMK 45 NW 08 HS	S	PN 315	12	M 18 x 1.5	M 20 x 1.5	14	17	23	24	22	22	15.3 x 2.4
XEWOMK 45 NW 10 HS	S	PN 250	14	M 20 x 1.5	M 22 x 1.5	14	16	30	24	27	27	17.3 x 2.4
XEWOMK 45 NW 13 HS	S	PN 250	16	M 22 x 1.5	M 24 x 1.5	14	16	30	24	27	27	19.3 x 2.4
XEWOMK 45 NW 16 HS	S	PN 250	20	M 27 x 2	M 30 x 2	18	16	33	27	30	32	23.6 x 2.9
XEWOMK 45 NW 20 HS	S	PN 160	25	M 33 x 2	M 36 x 2	18	19	35	31	38	36	29.5 x 3.0
XEWOMK 45 NW 25 HS	S	PN 160	30	M 42 x 2	M 42 x 2	18	24	36	37	50	50	38.0 x 3.0
XEWOMK 45 NW 32 HS	S	PN 160	38	M 48 x 2	M 52 x 2	21	21	36	37	50	55	44.5 x 3.0

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

## Product versions

**EWOMK 45** Screw-in fitting, angle 45°, Socket with union nut and cutting ring