XEWOMK 45


Screw-in fitting, angle 45°

HANSA-FLEX

Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	O-ring and spacer diaphragm ring
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction screw-in fitting
Construction	Angle 45°
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised



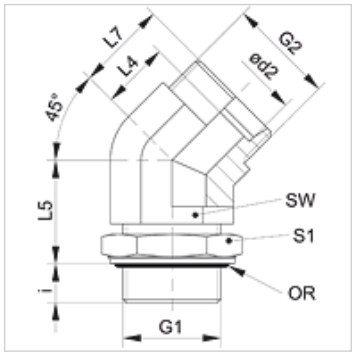

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XEWOMK 45 NW 04 HL	L	PN 315	6	M 10 x 1	M 12 x 1.5	8	9	20	16	14	13	8.1 x 1.6
XEWOMK 45 NW 06 HL	L	PN 315	8	M 12 x 1.5	M 14 x 1.5	11	12	18	19	14	17	9.3 x 2.4
XEWOMK 45 NW 08 HL	L	PN 315	10	M 14 x 1.5	M 16 x 1.5	11	12	22	19	19	17	11.3 x 2.4
XEWOMK 45 NW 10 HL	L	PN 315	12	M 16 x 1.5	M 18 x 1.5	11	14	23	21	19	19	13.3 x 2.4
XEWOMK 45 NW 13 HL	L	PN 315	15	M 18 x 1.5	M 22 x 1.5	12	17	23	24	22	22	15.3 x 2.4
XEWOMK 45 NW 16 HL	L	PN 250	18	M 22 x 1.5	M 26 x 1.5	12	17	30	24	27	27	19.3 x 2.4
XEWOMK 45 NW 20 HL	L	PN 160	22	M 26 x 1.5	M 30 x 2	16	19	30	26	27	32	23.3 x 2.4
XEWOMK 45 NW20 HL27	L	PN 160	22	M 27 x 2	M 30 x 2	15	19	30	26	30	32	23.6 x 2.9
XEWOMK 45 NW 25 HL	L	PN 160	28	M 33 x 2	M 36 x 2	15	23	34	31	36	38	29.5 x 3.0
XEWOMK 45 NW 32 HL	L	PN 160	35	M 42 x 2	M 45 x 2	15	27	36	37	50	50	38.0 x 3.0
XEWOMK 45 NW 40 HL	L	PN 160	42	M 48 x 2	M 52 x 2	17	26	36	37	50	55	44.5 x 3.0
XEWOMK 45 NW 03 HS	S	PN 315	6	M 12 x 1.5	M 14 x 1.5	11	9	18	16	14	17	9.3 x 2.4
XEWOMK 45 NW 04 HS	S	PN 315	8	M 14 x 1.5	M 16 x 1.5	11	12	18	19	19	17	11.3 x 2.4
XEWOMK 45 NW 06 HS	S	PN 315	10	M 16 x 1.5	M 18 x 1.5	12	13	22	21	19	19	13.3 x 2.4
XEWOMK 45 NW 08 HS	S	PN 315	12	M 18 x 1.5	M 20 x 1.5	14	17	23	24	22	22	15.3 x 2.4
XEWOMK 45 NW 10 HS	S	PN 250	14	M 20 x 1.5	M 22 x 1.5	14	16	30	24	27	27	17.3 x 2.4
XEWOMK 45 NW 13 HS	S	PN 250	16	M 22 x 1.5	M 24 x 1.5	14	16	30	24	27	27	19.3 x 2.4
XEWOMK 45 NW 16 HS	S	PN 250	20	M 27 x 2	M 30 x 2	18	16	33	27	30	32	23.6 x 2.9
XEWOMK 45 NW 20 HS	S	PN 160	25	M 33 x 2	M 36 x 2	18	19	35	31	38	36	29.5 x 3.0
XEWOMK 45 NW 25 HS	S	PN 160	30	M 42 x 2	M 42 x 2	18	24	36	37	50	50	38.0 x 3.0
XEWOMK 45 NW 32 HS	S	PN 160	38	M 48 x 2	M 52 x 2	21	21	36	37	50	55	44.5 x 3.0

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

EWOMK 45	Screw-in fitting, angle 45°, Socket with union nut and cutting ring

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.