
XVEWO 45 VA

Fitting, angle 45°

Properties

Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction fitting
Construction	Angle 45°
Scope of supply	Socket (without union nut and cutting ring)
Material	Stainless steel



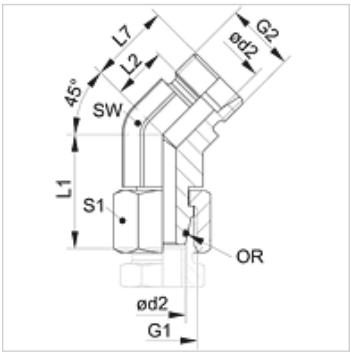

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1 + G2	L1 (mm)	L2 (mm)	L7 (mm)	AF (mm)	S1	OR
XVEWO 45 NW 04 HL VA	L	PN 315	6	M 12 x 1.5	26,0	9,0	16,0	14	14	4.0 x 1.5
XVEWO 45 NW 06 HL VA	L	PN 315	8	M 14 x 1.5	27,5	12,0	27,5	14	17	6.0 x 1.5
XVEWO 45 NW 08 HL VA	L	PN 315	10	M 16 x 1.5	29,0	12,0	19,0	19	19	7.5 x 1.5
XVEWO 45 NW 10 HL VA	L	PN 315	12	M 18 x 1.5	29,5	14,0	21,0	19	22	9.0 x 1.5
XVEWO 45 NW 13 HL VA	L	PN 315	15	M 22 x 1.5	32,5	17,0	24,0	22	27	12.0 x 2.0
XVEWO 45 NW 16 HL VA	L	PN 315	18	M 26 x 1.5	35,5	16,5	24,0	27	32	15.0 x 2.0
XVEWO 45 NW 20 HL VA	L	PN 160	22	M 30 x 2	38,5	18,5	26,0	30	36	20.0 x 2.0
XVEWO 45 NW 25 HL VA	L	PN 160	28	M 36 x 2	41,5	23,0	30,5	36	41	26.0 x 2.0
XVEWO 45 NW 32 HL VA	L	PN 160	35	M 45 x 2	51,0	26,5	37,0	50	50	32.0 x 2.5
XVEWO 45 NW 40 HL VA	L	PN 160	42	M 52 x 2	56,0	26,0	37,0	50	60	38.0 x 2.5
XVEWO 45 NW 03 HS VA	S	PN 630	6	M 14 x 1.5	27,0	9,0	16,0	14	17	4.0 x 1.5
XVEWO 45 NW 04 HS VA	S	PN 630	8	M 16 x 1.5	27,5	12,0	19,0	19	19	6.0 x 1.5
XVEWO 45 NW 06 HS VA	S	PN 630	10	M 18 x 1.5	30,0	13,5	21,0	19	22	7.5 x 1.5
XVEWO 45 NW 08 HS VA	S	PN 630	12	M 20 x 1.5	31,0	16,5	24,0	19	24	9.0 x 1.5
XVEWO 45 NW 13 HS VA	S	PN 400	16	M 24 x 1.5	36,5	15,5	24,0	19	30	12.0 x 2.0
XVEWO 45 NW 16 HS VA	S	PN 400	20	M 30 x 2	44,5	16,0	26,5	27	36	16.3 x 2.4
XVEWO 45 NW 20 HS VA	S	PN 400	25	M 36 x 2	50,0	18,5	30,5	36	46	20.3 x 2.4
XVEWO 45 NW 25 HS VA	S	PN 400	30	M 42 x 2	55,0	23,5	37,0	50	50	25.3 x 2.4
XVEWO 45 NW 32 HS VA	S	PN 315	38	M 52 x 2	63,0	21,0	37,0	50	60	33.3 x 2.4

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XVEWO 45	Fitting, angle 45°, Steel
VEWO 45 VA	Fitting, angle 45°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.