
XVEWO VA
Fitting, angle 90°

Properties

Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Adjustable direction fitting
Construction	Angle 90°
Standard	ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Stainless steel



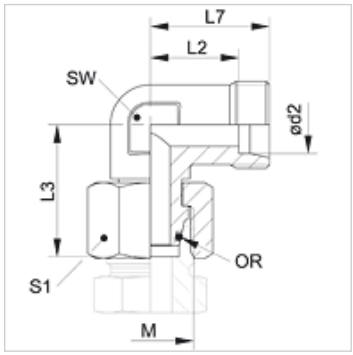

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

Identification	Series	Operating pressure	Ø d2 (mm)	M	L2 (mm)	L3 (mm)	L7 (mm)	AF (mm)	S1	OR
XVEWO NW 04 HL VA	L	PN 315	6	M 12 x 1.5	12,0	26,0	19	12	14	4.0 x 1.5
XVEWO NW 06 HL VA	L	PN 315	8	M 14 x 1.5	14,0	27,5	21	12	17	6.0 x 1.5
XVEWO NW 08 HL VA	L	PN 315	10	M 16 x 1.5	15,0	29,0	22	14	19	7.5 x 1.5
XVEWO NW 10 HL VA	L	PN 315	12	M 18 x 1.5	17,0	29,5	24	17	22	9.0 x 1.5
XVEWO NW 13 HL VA	L	PN 315	15	M 22 x 1.5	21,0	32,5	28	19	27	12.0 x 2.0
XVEWO NW 16 HL VA	L	PN 315	18	M 26 x 1.5	23,5	35,5	31	24	32	15.0 x 2.0
XVEWO NW 20 HL VA	L	PN 160	22	M 30 x 2	27,5	38,5	35	27	36	20.0 x 2.0
XVEWO NW 25 HL VA	L	PN 160	28	M 36 x 2	30,5	41,5	38	36	41	26.0 x 2.0
XVEWO NW 32 HL VA	L	PN 160	35	M 45 x 2	34,5	51,0	45	41	50	32.0 x 2.5
XVEWO NW 40 HL VA	L	PN 160	42	M 52 x 2	40,0	56,0	51	50	60	38.0 x 2.5
XVEWO NW 03 HS VA	S	PN 630	6	M 14 x 1.5	16,0	27,0	23	12	17	4.0 x 1.5
XVEWO NW 04 HS VA	S	PN 630	8	M 16 x 1.5	17,0	27,5	24	14	19	6.0 x 1.5
XVEWO NW 06 HS VA	S	PN 630	10	M 18 x 1.5	17,5	30,0	25	17	22	7.5 x 1.5
XVEWO NW 08 HS VA	S	PN 630	12	M 20 x 1.5	21,5	31,0	29	17	24	9.0 x 1.5
XVEWO NW 10 HS VA	S	PN 630	14	M 22 x 1.5	22,0	35,0	30	19	27	10.0 x 2.0
XVEWO NW 13 HS VA	S	PN 400	16	M 24 x 1.5	24,5	36,5	33	24	30	12.0 x 2.0
XVEWO NW 16 HS VA	S	PN 400	20	M 30 x 2	26,5	44,5	37	27	36	16.3 x 2.4
XVEWO NW 20 HS VA	S	PN 400	25	M 36 x 2	30,0	50,0	42	36	46	20.3 x 2.4
XVEWO NW 25 HS VA	S	PN 400	30	M 42 x 2	35,5	55,0	49	41	50	25.3 x 2.4
XVEWO NW 32 HS VA	S	PN 315	38	M 52 x 2	41,0	63,0	57	50	60	33.3 x 2.4

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XVEWO	Fitting, angle 90°, Steel
VEWO VA	Fitting, angle 90°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.